

# Vector Frame Master 20ft Modular Backwall Kit 27

## VF-K-27

The 10ft x 20ft inline Vector Frame<sup>®</sup> Kit 27 is a symmetrical modular exhibit that offers accessible storage, lots of area for messaging and branding and digital promotion! Extrusion frames are coupled with push-fit SEG graphics to create a sleek, seamless appearance. Closet features ample storage and the kit includes two medium monitor mounts to hang TVs or LCD screens.



## features and benefits:

- 50mm silver extrusion frame
- Single-sided SEG push-fit fabric graphics
- Storage closet for convenient storage and locking doors
- Medium monitor bracket holds 32-55" LCD\*, max weight: 40 lbs
- Ships freight in a wood crate
- Lifetime hardware warranty against manufacturer defects

## dimensions:

### Hardware

Assembled unit:  
228.35" w x 94.49" h x 51.18" d  
5800mm(w) x 2400mm(h) x 1300mm(d)

Approximate weight:  
344 lbs / 156 kg

### Graphic

Refer to related graphic template for more information.

Visit:  
<https://www.theexhibitorshandbook.com/download-graphic-templates>

### Shipping

Packing case(s):  
1 HALF-WOODCRATE

### Shipping dimensions:

WOOD-CRATE:  
101" l x 31" h x 52.75" d  
2566mm(l) x 788mm(h) x 1340mm(d)

Approximate total shipping weight:  
612 lbs / 278 kg

## additional information:

Graphic material:

Dye-sublimation SEG push-fit fabric

When included in a larger kit, a different packaging solution will be listed to accommodate all contents of the kit. Individual packaging no longer provided.

Lighting Power Requirements:

Total wattage needed:	Total ampage needed:	Voltage used:
72W	7.2A	100-240V



This product may include the following materials for recycle:  
aluminum, select wood, fabric, cardboard, paper, steel, and plastics.

2 person assembly recommended:



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

# Included In Your Kit

Tools, Components, & Connectors



HEX-KEY-SET x1



FABRIC STEAMER-ES x1




5MM-ALLEN-T x8




VF-FCDOOR-50MM-1200-L x1




LUM-LED2-ORL-B x5

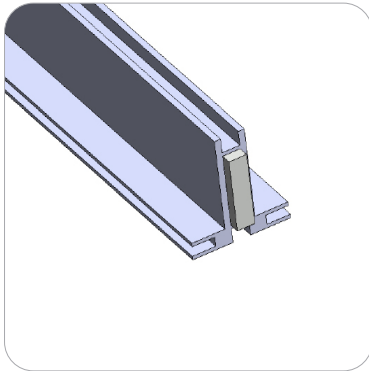


PHFC2-1200-L-L x4

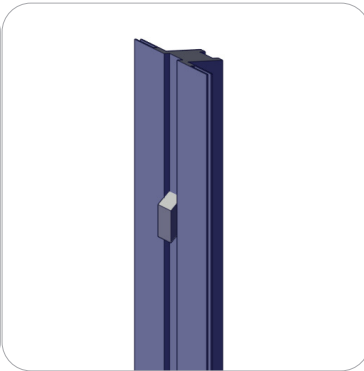


PHFC2-2400-MCB9-MCB9-SIDE x6

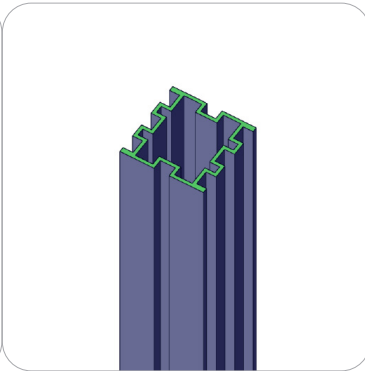


PM2S2-2400 x2

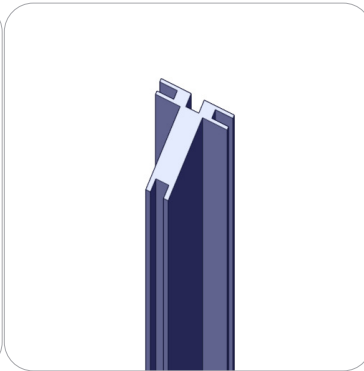


PHFC2-1200-MCB9-MCB9 x4

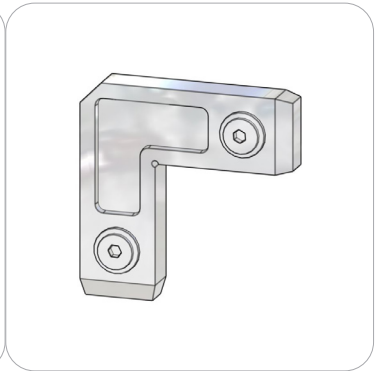


CB9 x12

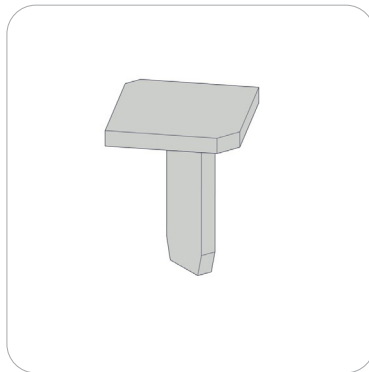


PMFC2-CAP x2

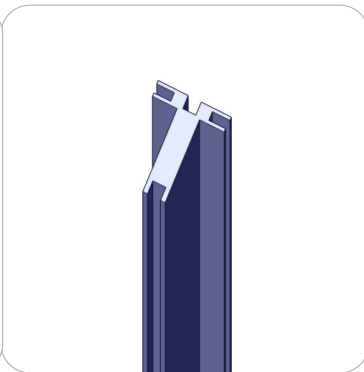


PHFC2-2200-MCB9-MCB9 x4

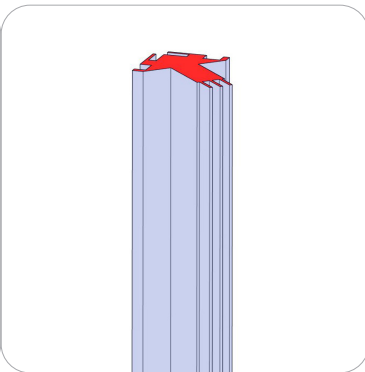

PMFC2-90-2386 x42

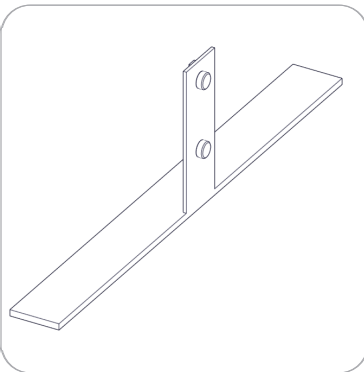

SW-FOOT-500-LN x1

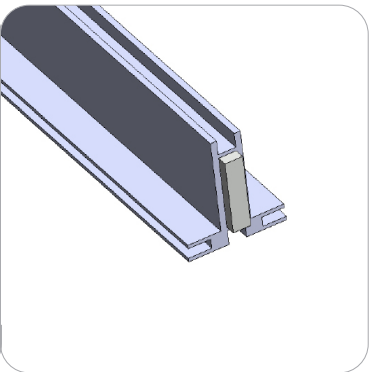

PHFC2-1189-L-L x4


# Included In Your Kit




FREESTANDING-SPLIT-MM-2 x2

Tools, Components, & Connectors


# Included In Your Kit

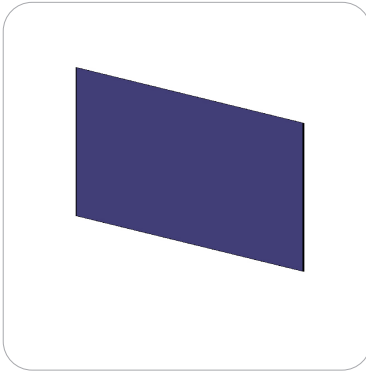


VF-K-27-A-G x1

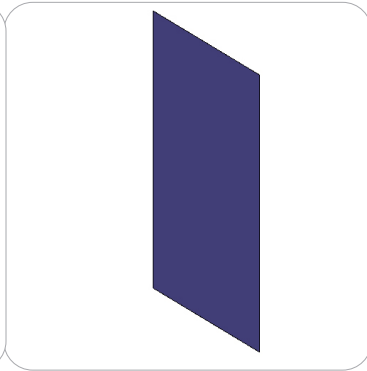


VF-K-27-B-G x1

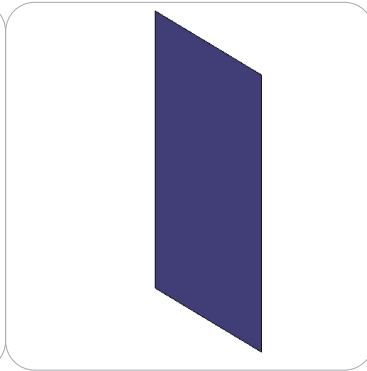

VF-K-27-C-G x1

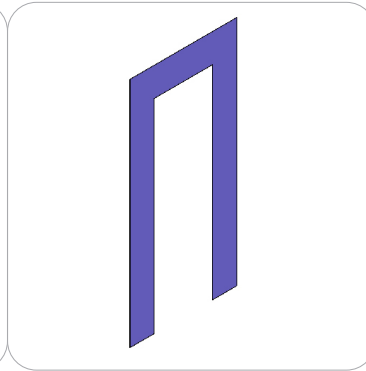


VF-K-27-D-G x1

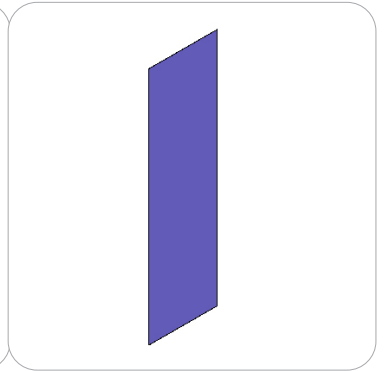


VF-K-27-E-G x1

Graphics

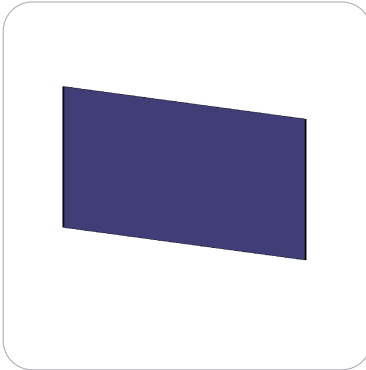


VF-K-27-F-G x1

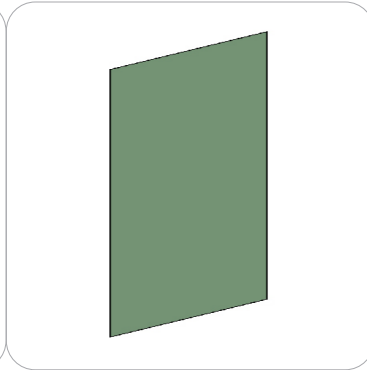


VF-K-27-G-G x1




VF-K-27-H-G x1

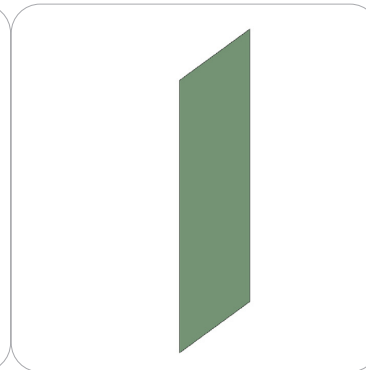


VF-K-27-J-G x1

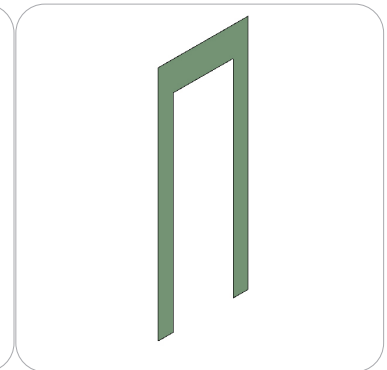


VF-K-27-I-G x1

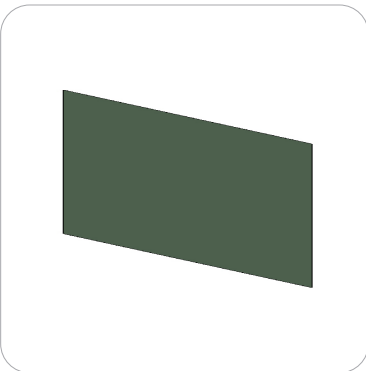


VF-K-27-L-G x1

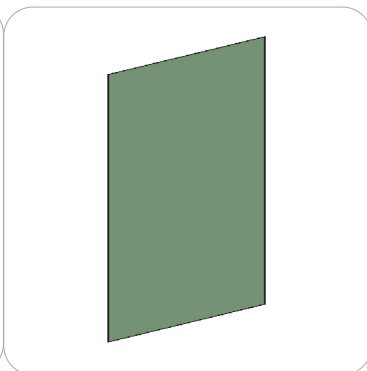

VF-K-27-M-G x1

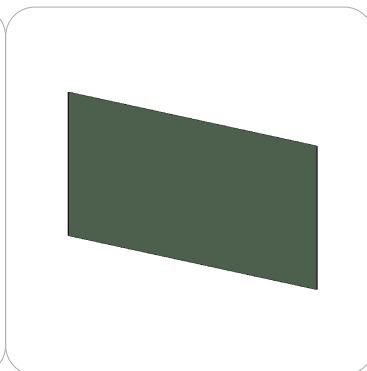


VF-K-27-N-G x1

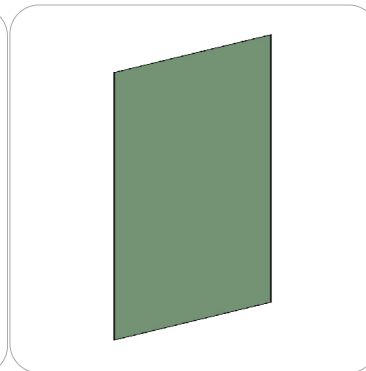


VF-K-27-K-G x1

# Kit Components

VF-K-27

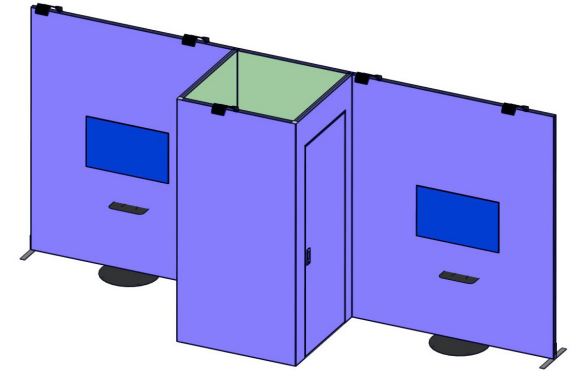


VECTOR BACKWALL

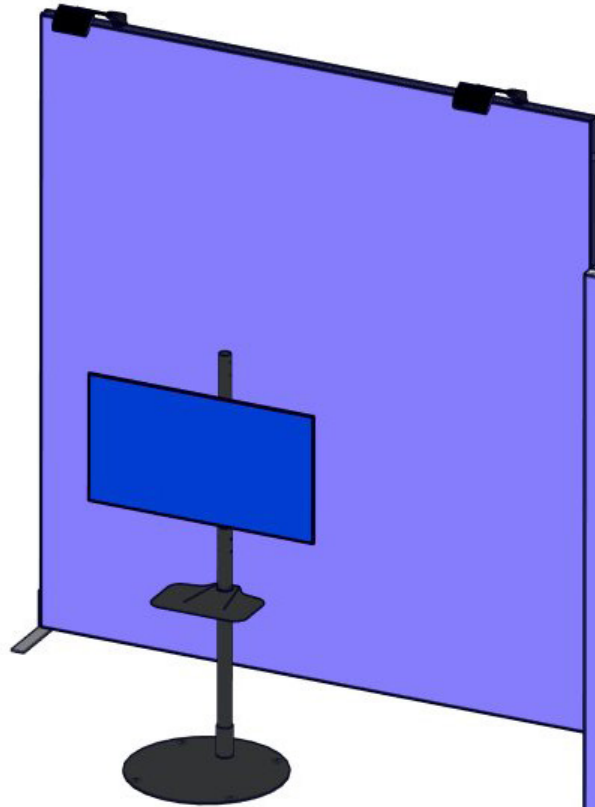


FREESTANDING-SPLIT-MM-2

50MM CLOSET


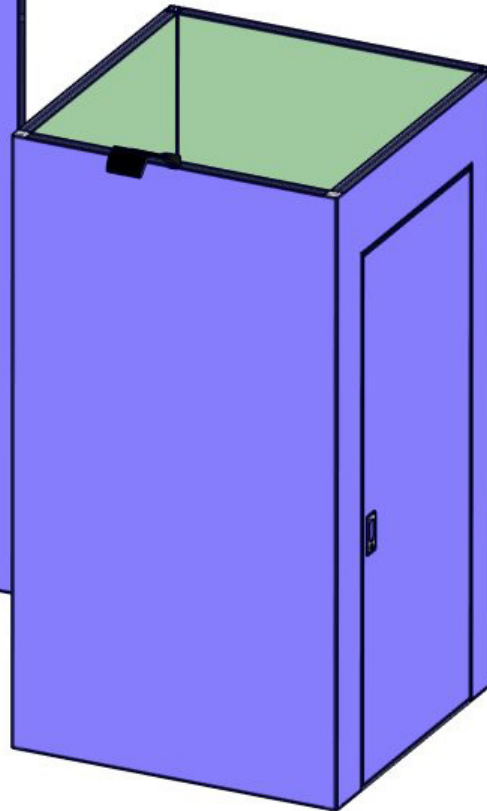


VECTOR BACKWALL

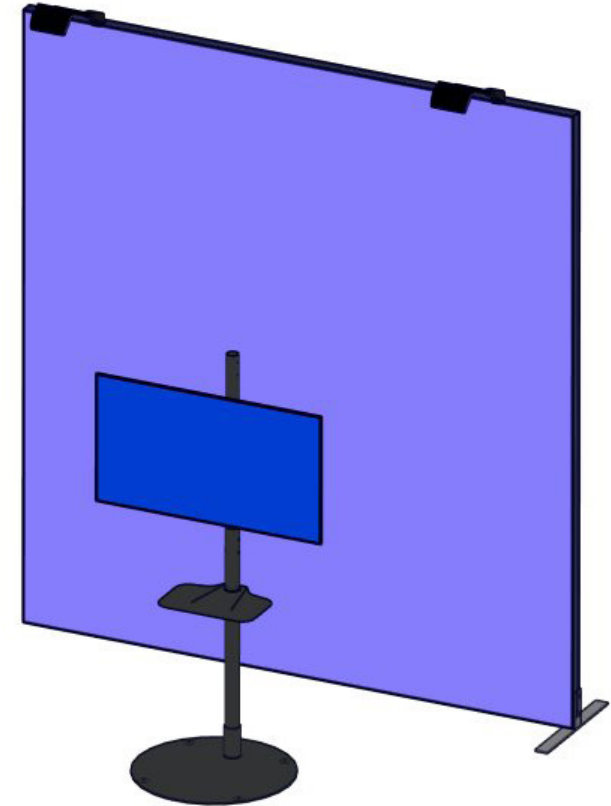


FREESTANDING-SPLIT-MM-2



# Closet Assembly

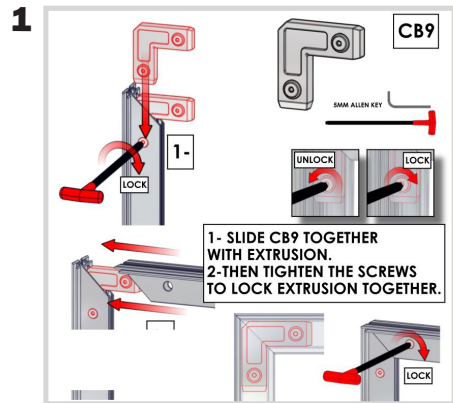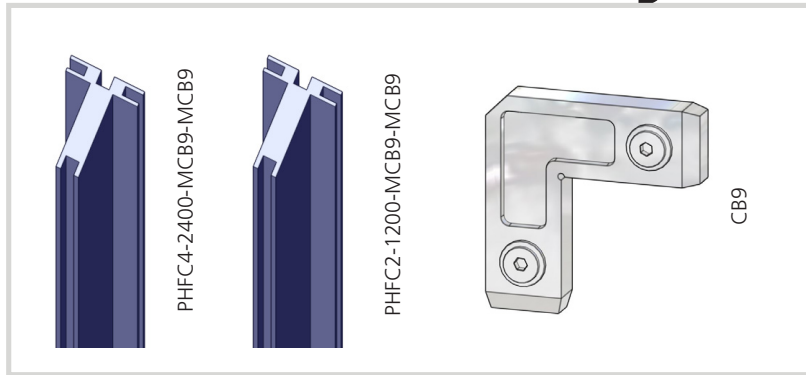


Attach the back frame of the closet together using the Allen Tool and the CB9 Connectors.

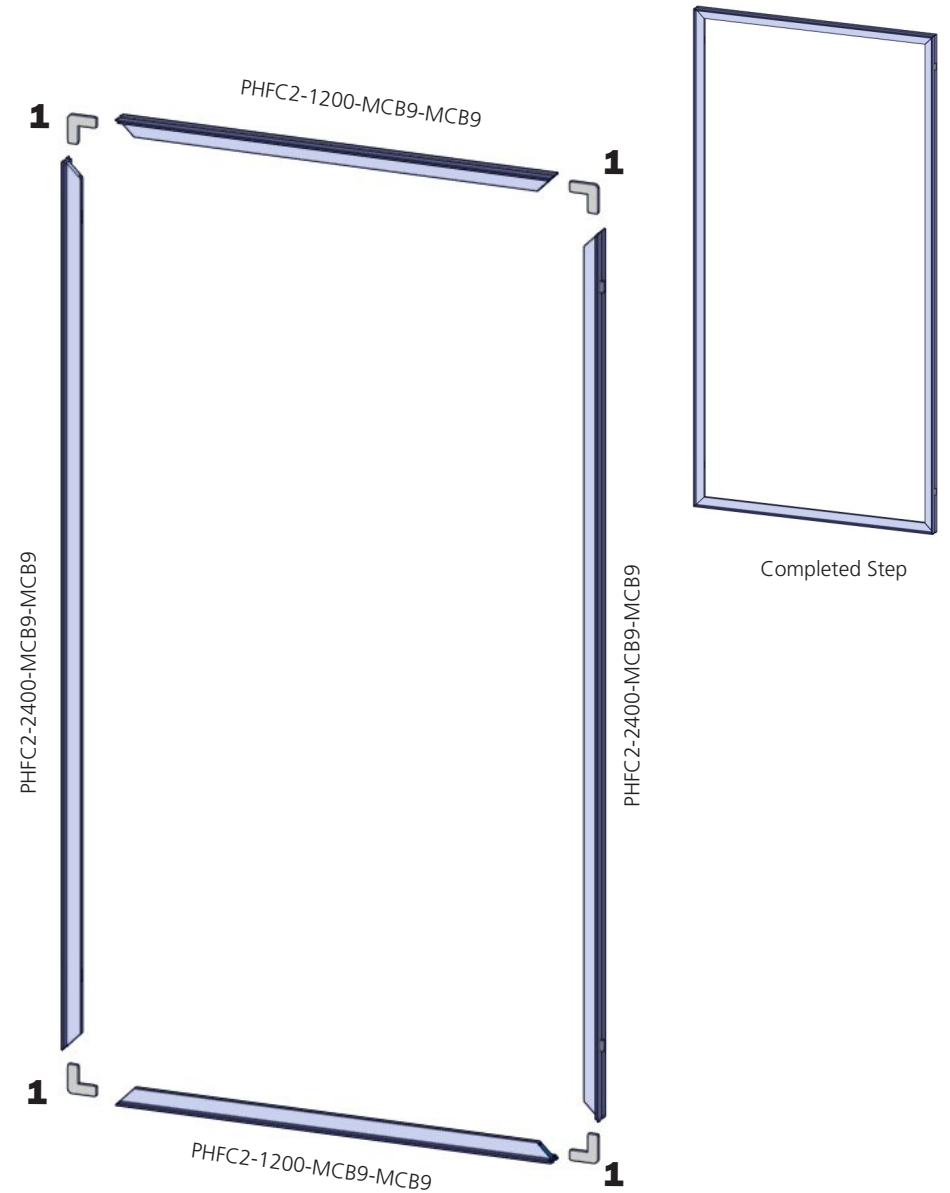



# Closet Assembly

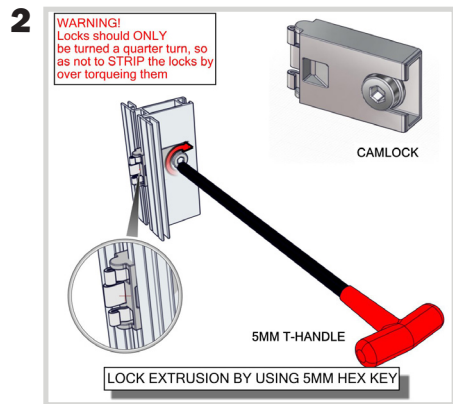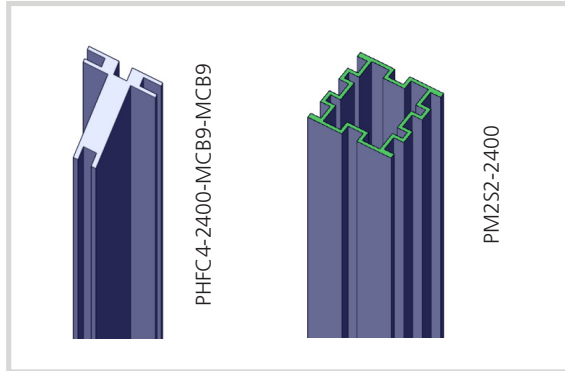



Inside the PHFC2s are cam locks.

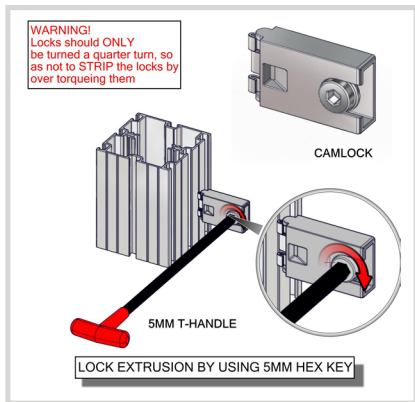


These will attach the PHFC2 to the side of the PM2S2. So you can connect your PM2S2s to the frame from the previous step.

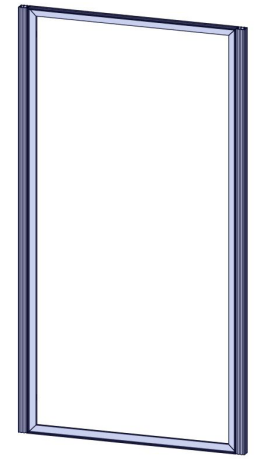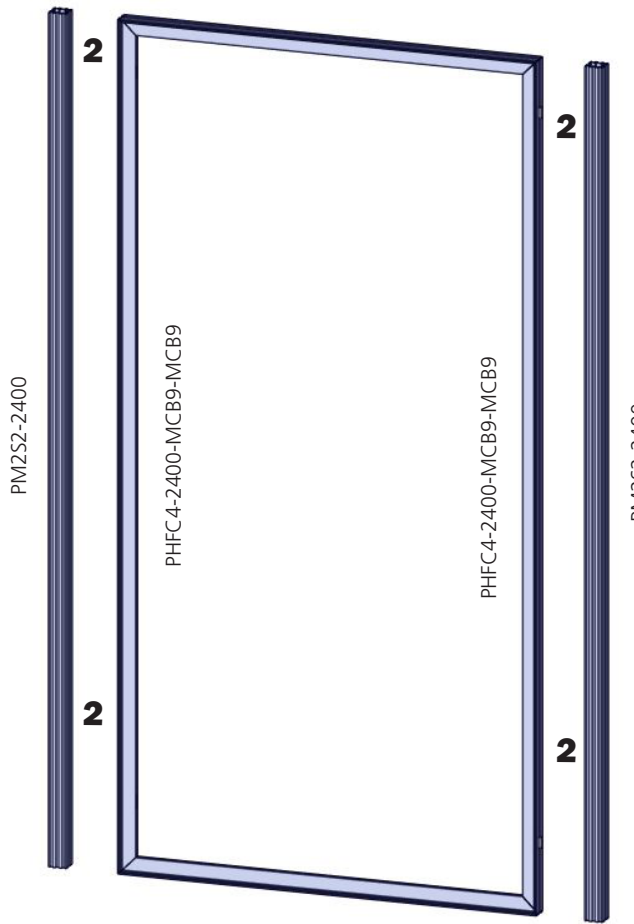

# Closet Assembly

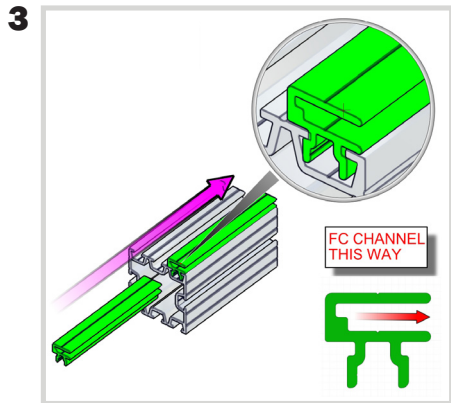
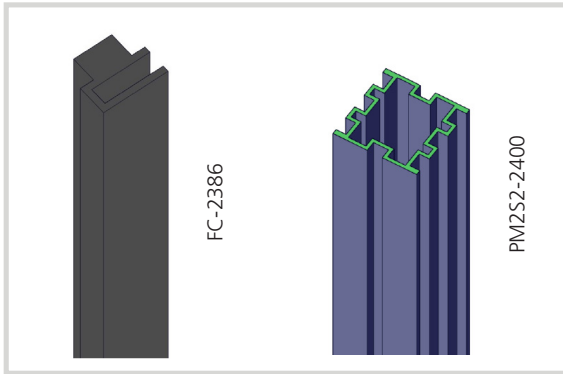


Slide FC Channels into the outside channels of the PM2S2 facing forward.

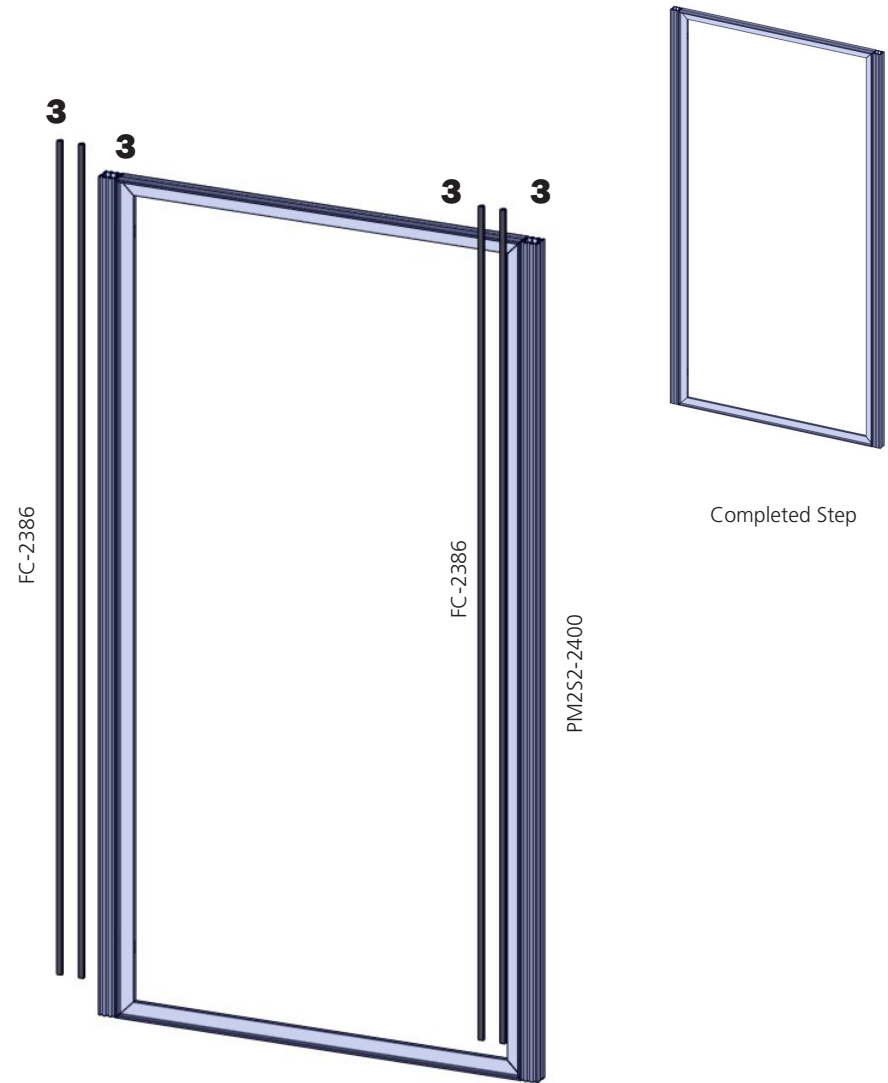






# Closet Assembly

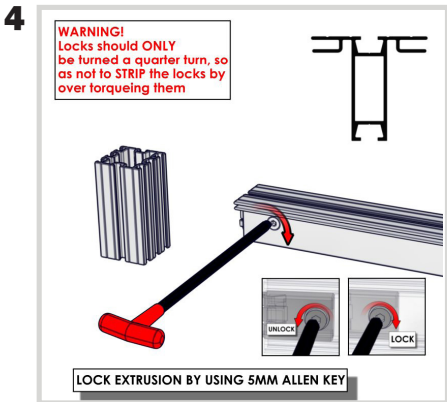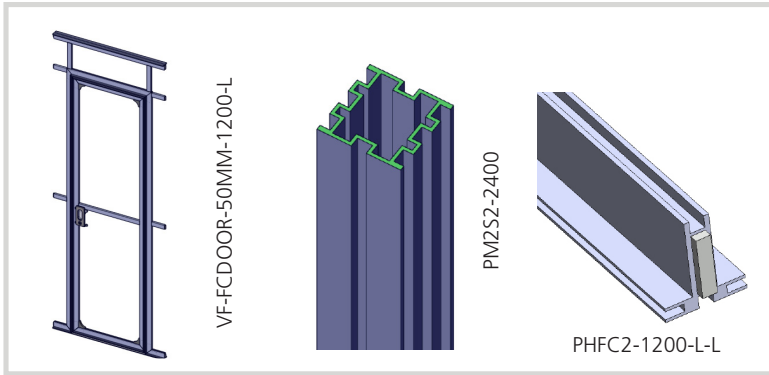

Using the 5mm Allen-T attach the PHFC2s at the top and bottom of your door frame to two of your PM2S2s and the PM2S2s on the other

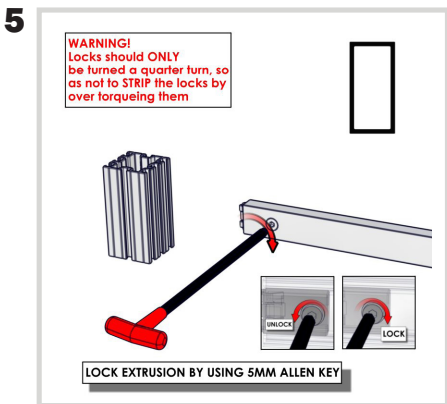



Using the 5mm Allen-T attach the PH1s on your door frame to your PM2S2s.

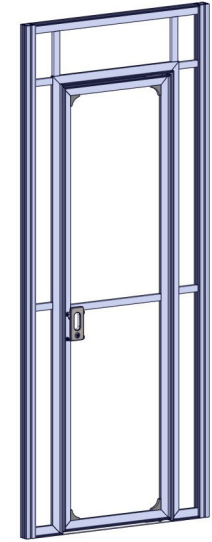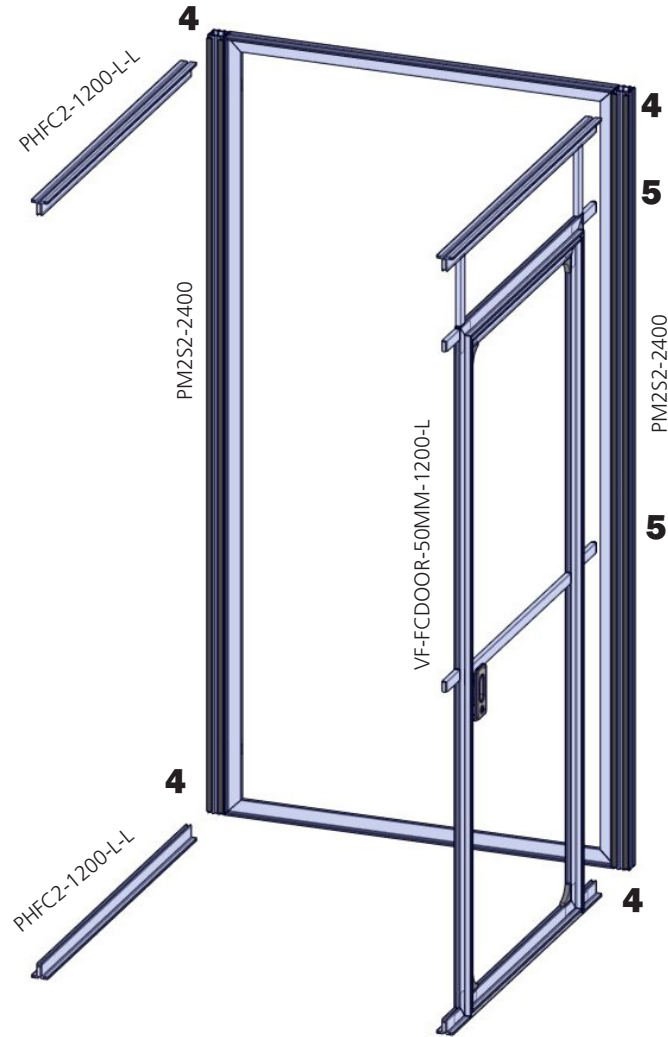


Completed Step

Door frame comes assembled  
\*DO NOT DISASSEMBLE\*


# Closet Assembly

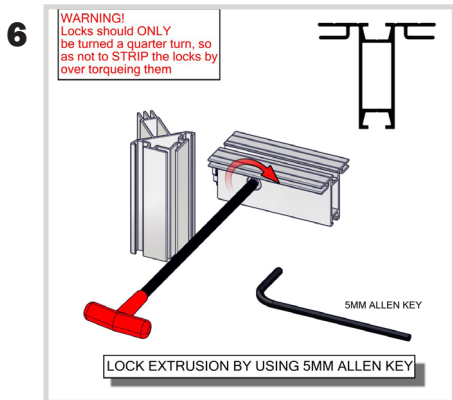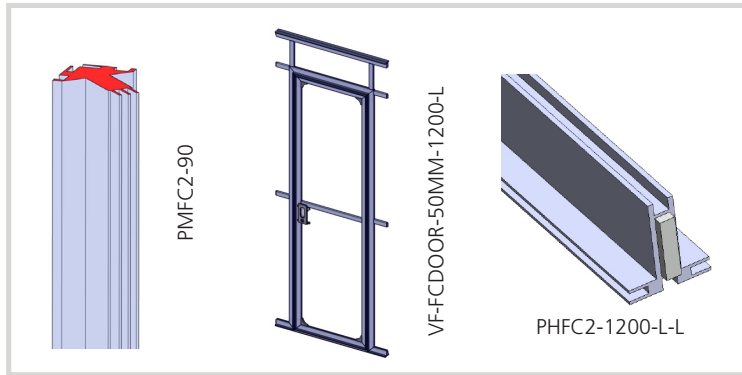



Attach the PHFC2s of your closet to the PMFC2-90s.

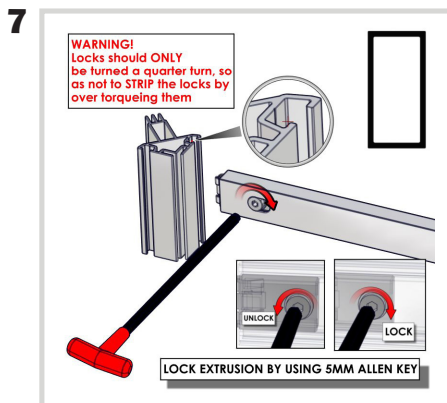



Using the 5mm Allen-T attach the PH1s on your door frame to your PMFC2-90s.

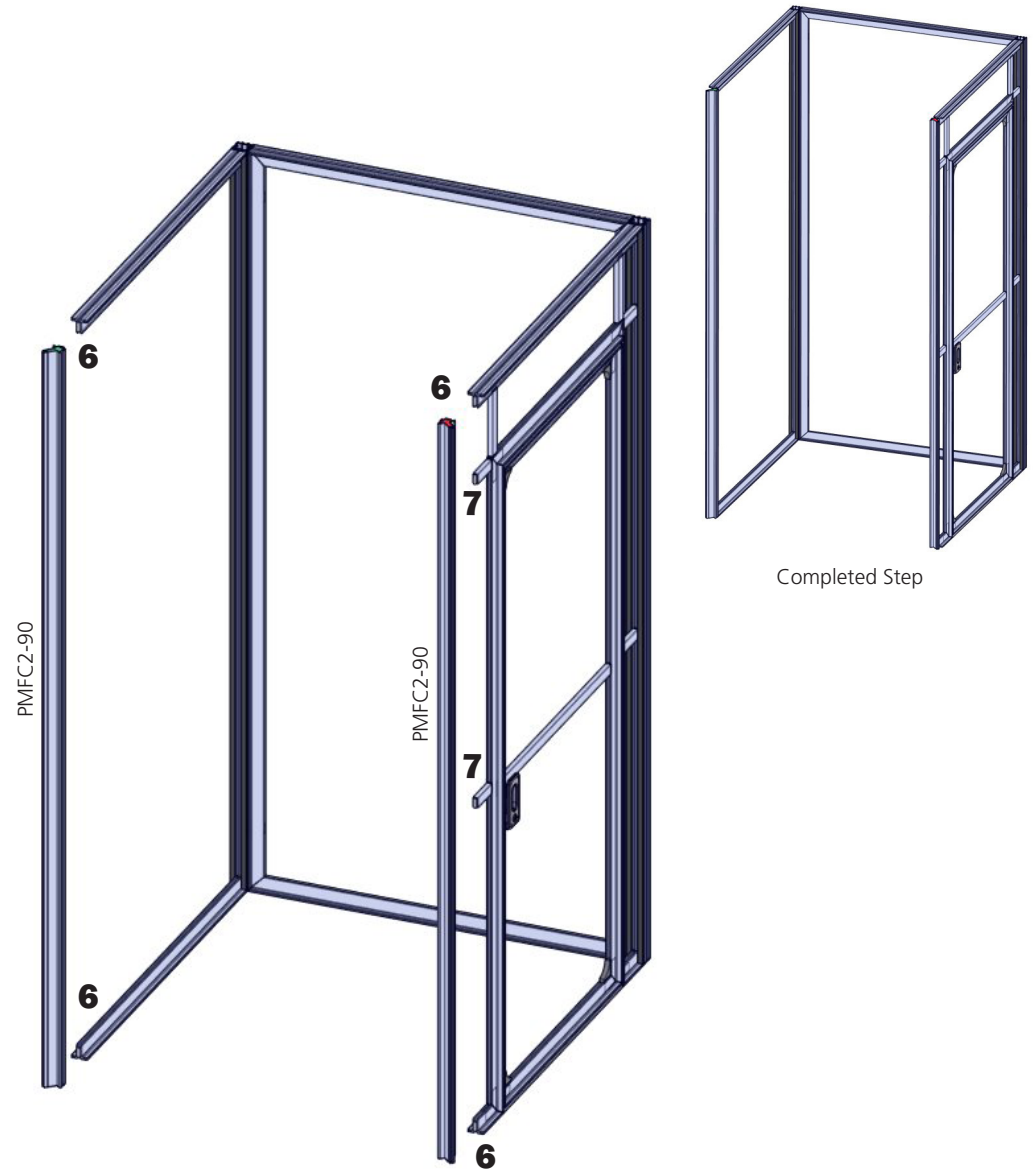



# Closet Assembly

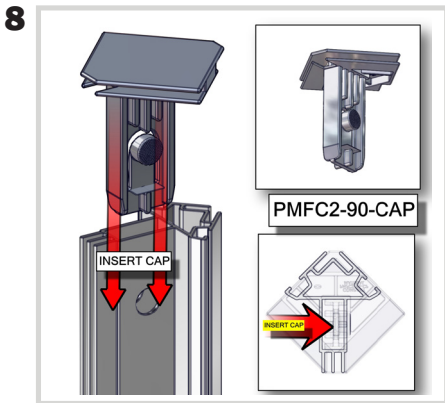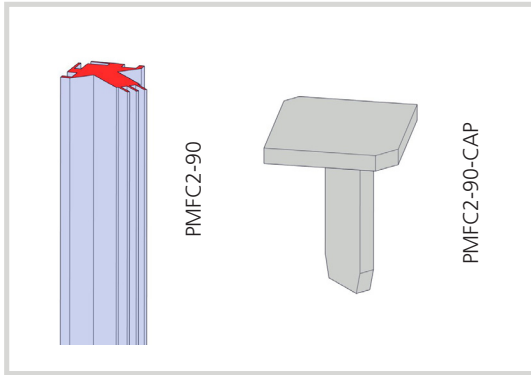


Push down on the snap button on your cap and push it into the top and bottom of PMFC2-90 posts until it snaps in place.

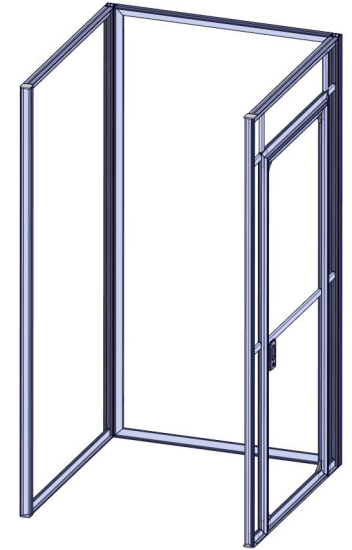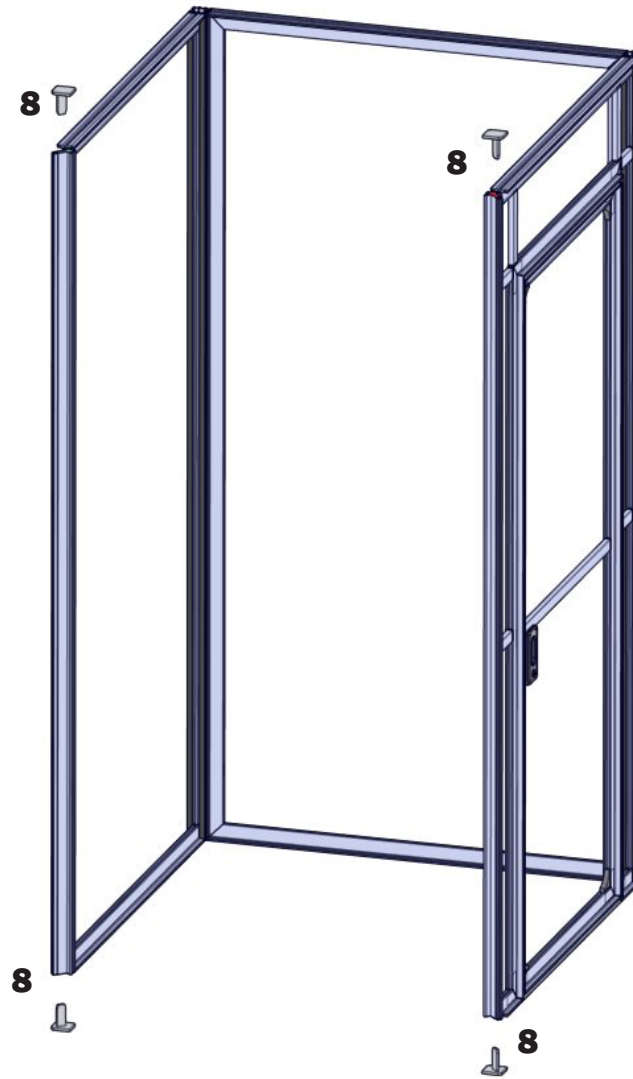


# Closet Assembly

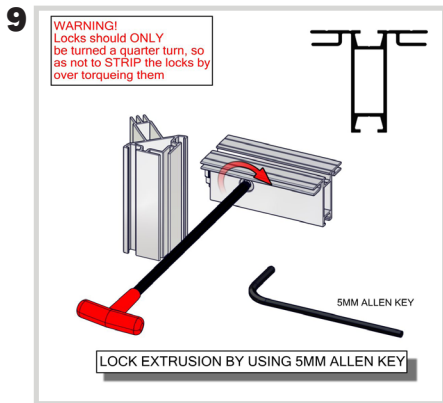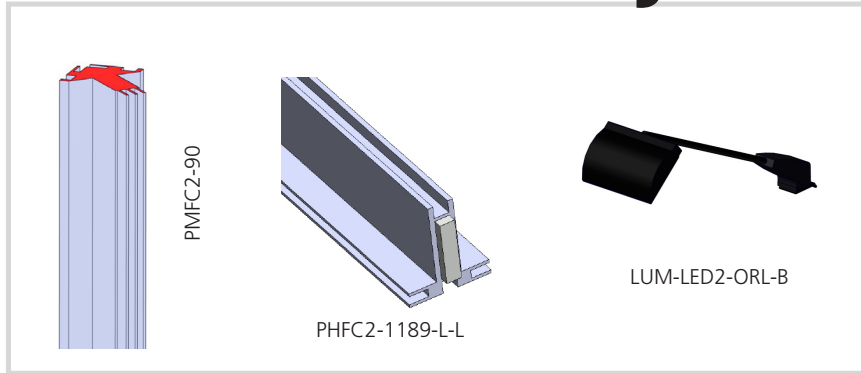




Finish your closet structure by attaching your PHFC2s in the front to your PMFC2-90s.

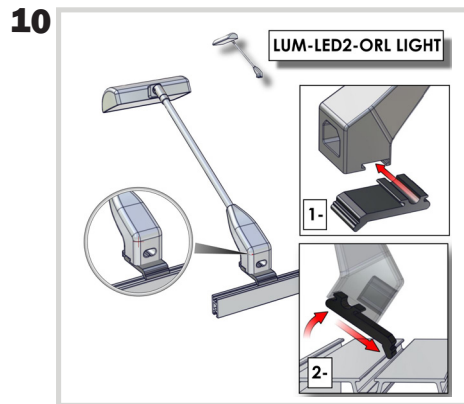


Using the bottom clip attached to the light slip the plastic bottom into the channel on top of the PHFC2.

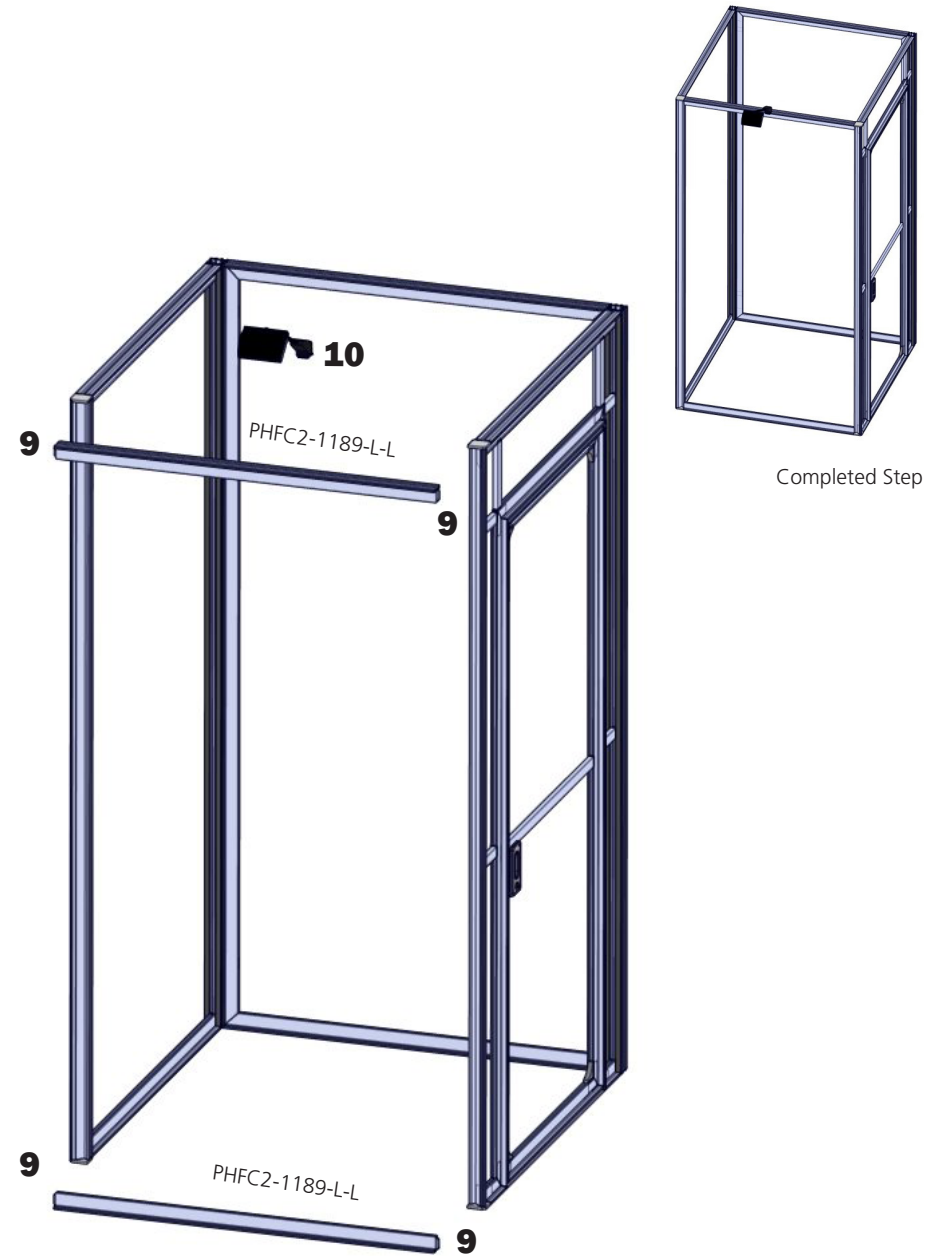


# Closet Graphic Application

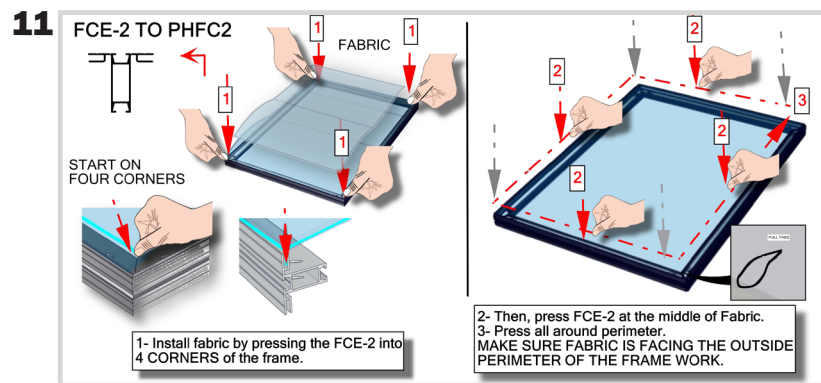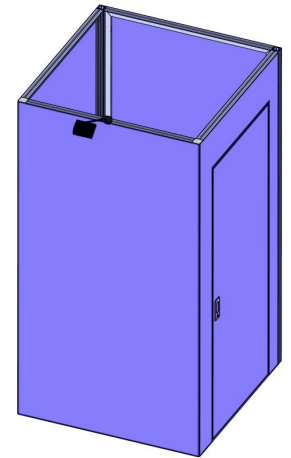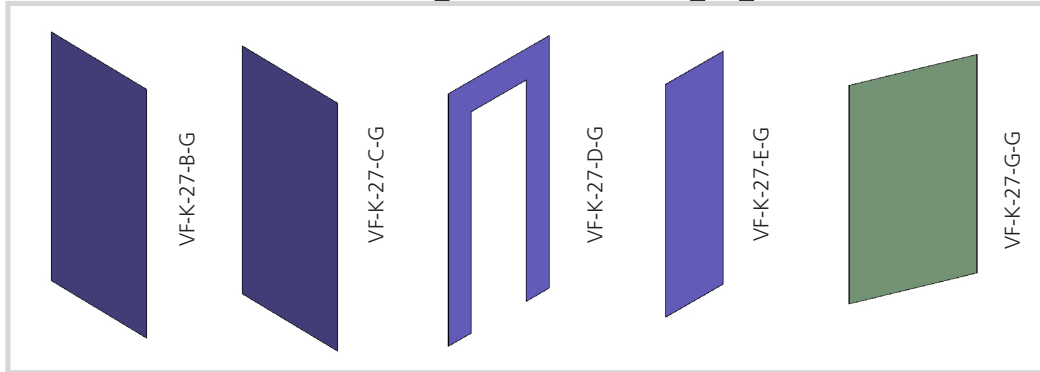



Place the FCE-2 part of the graphic into the outer channels of the PHFC2.

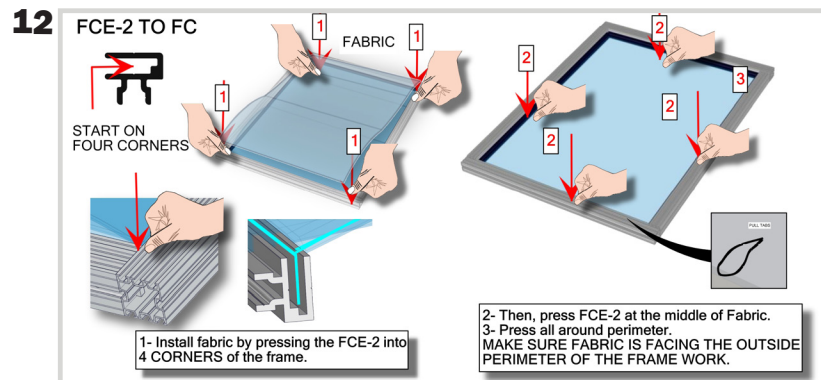

Place the FCE-2 part of the graphics into the FC channel that's attached to the PM2S2 extrusions.

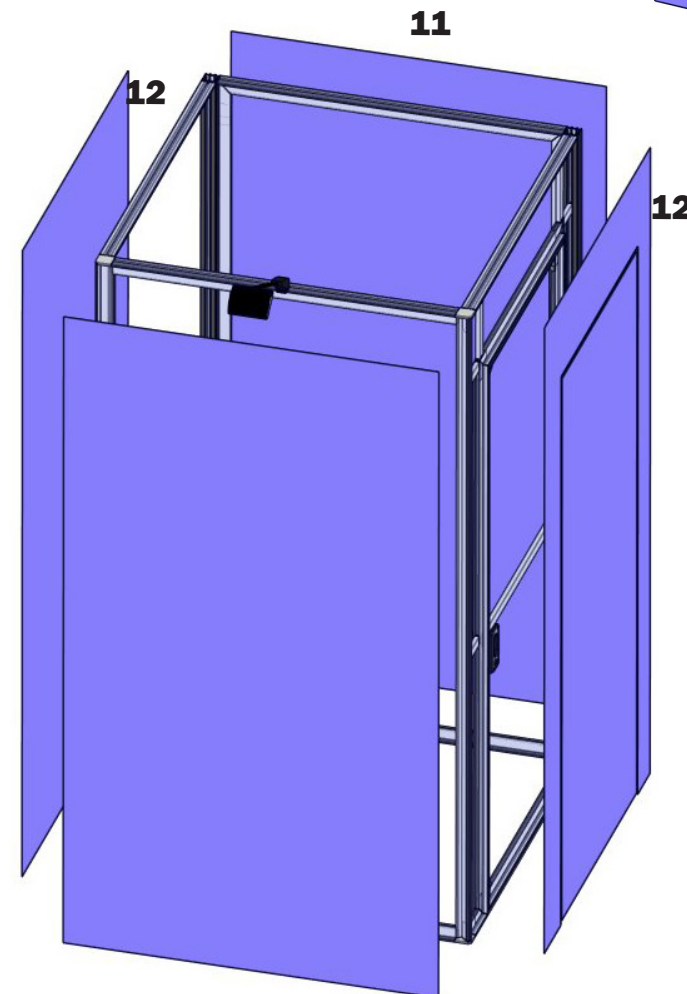


# Closet Graphic Application

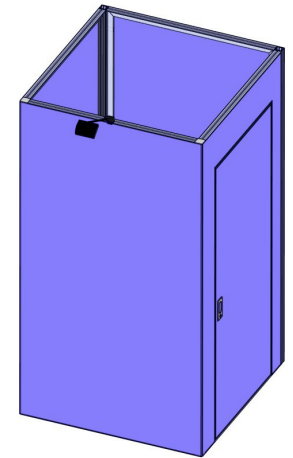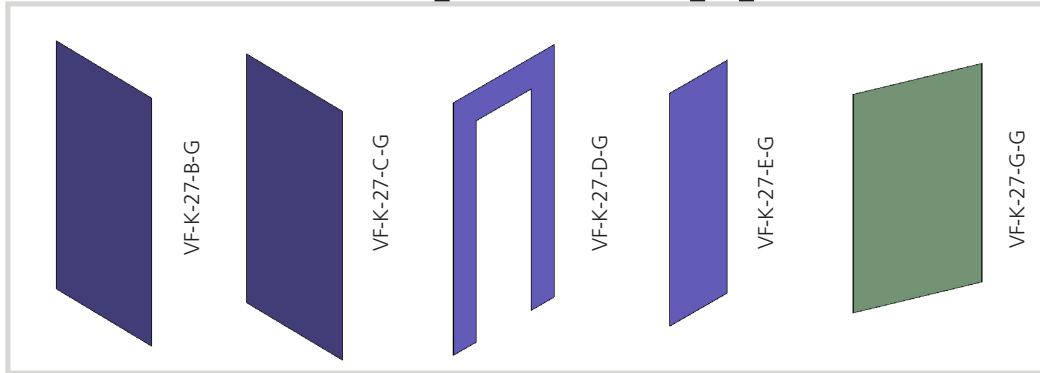


Completed Step



**13**

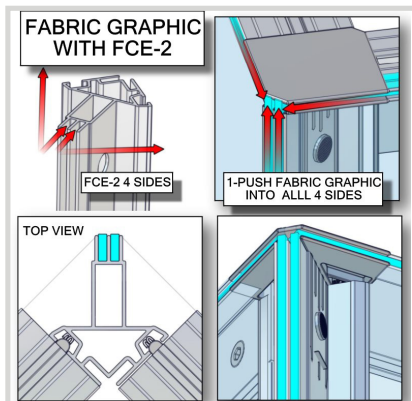


Insert your graphics into the FCE channels of your PMFC2 extrusions.

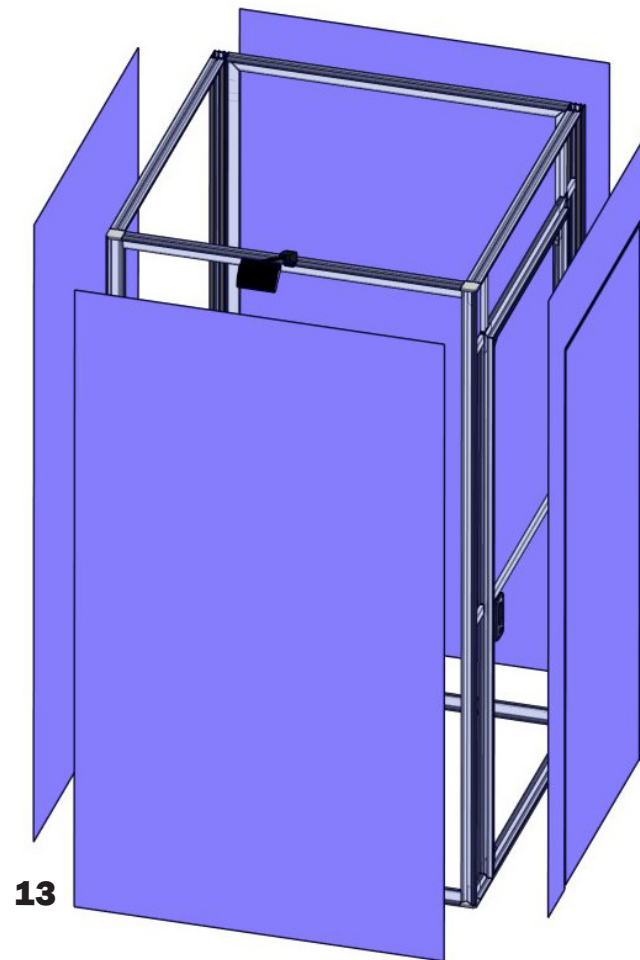


# Closet Liner Application

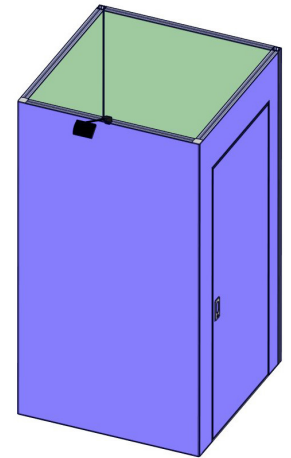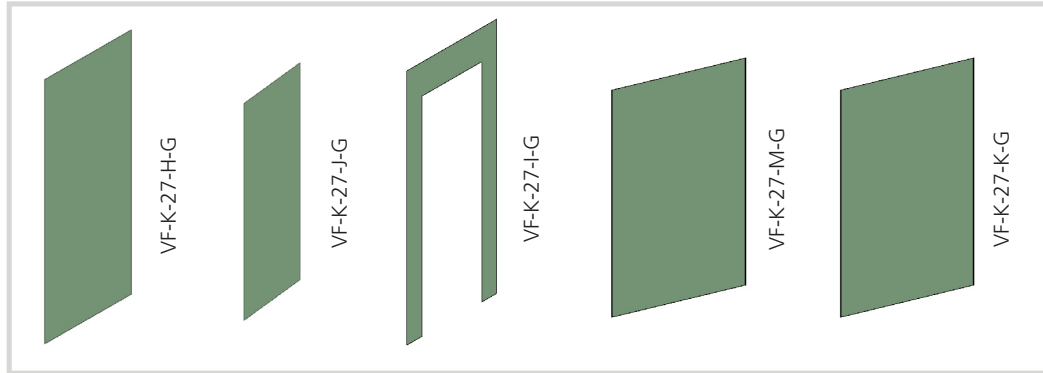


Completed Step

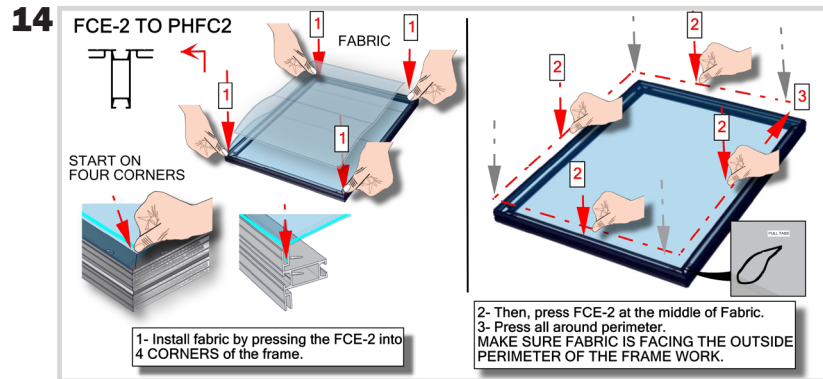



Place the FCE-2 part of the graphic into the outer channels of the PHFC2.

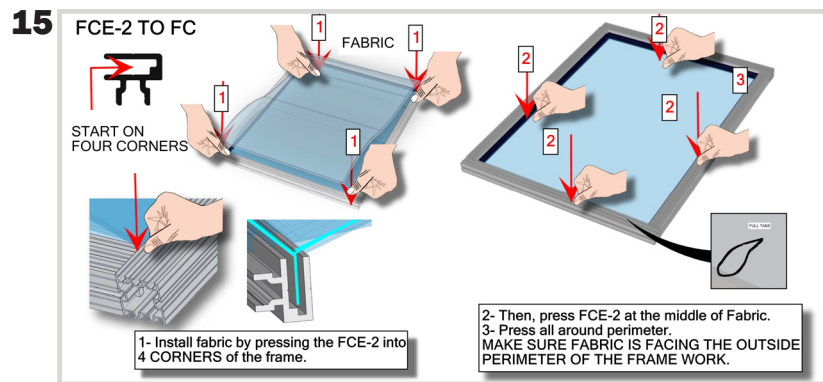


Place the FCE-2 part of the graphics into the FC channel that's attached to the PM2S2 extrusions.

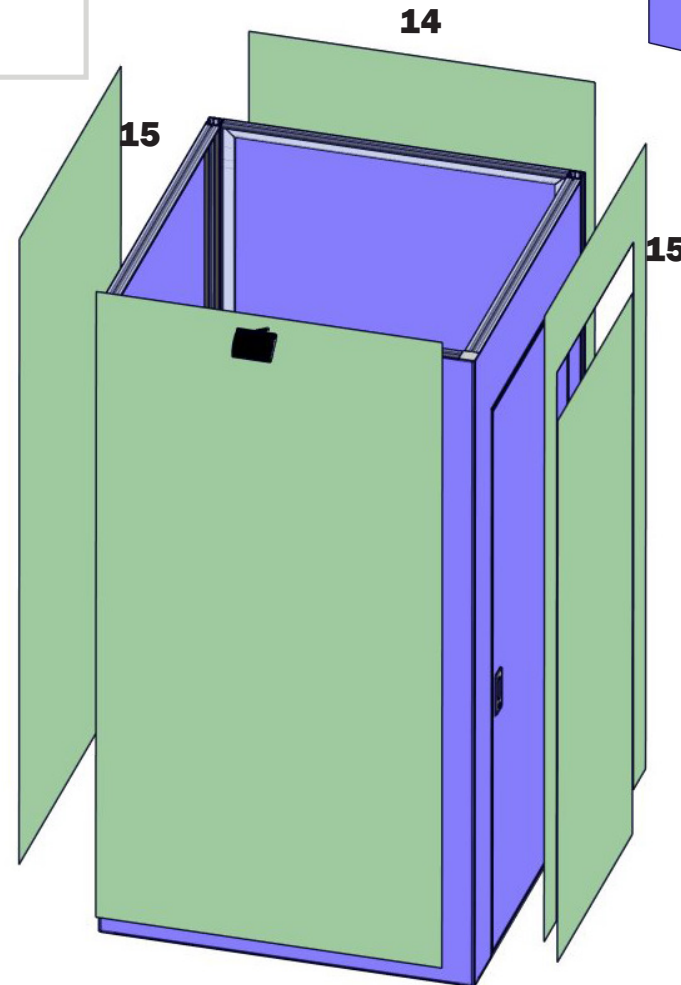

# Closet Liner Application

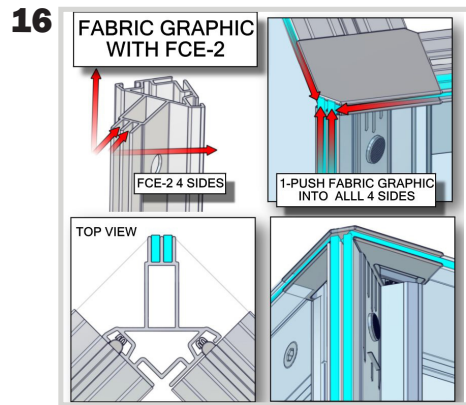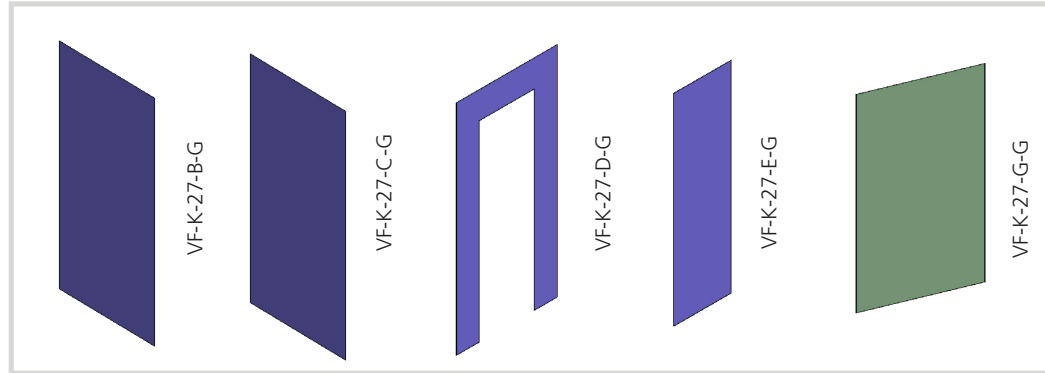




Insert your graphics into the FCE channels of your PMFC2 extrusions.

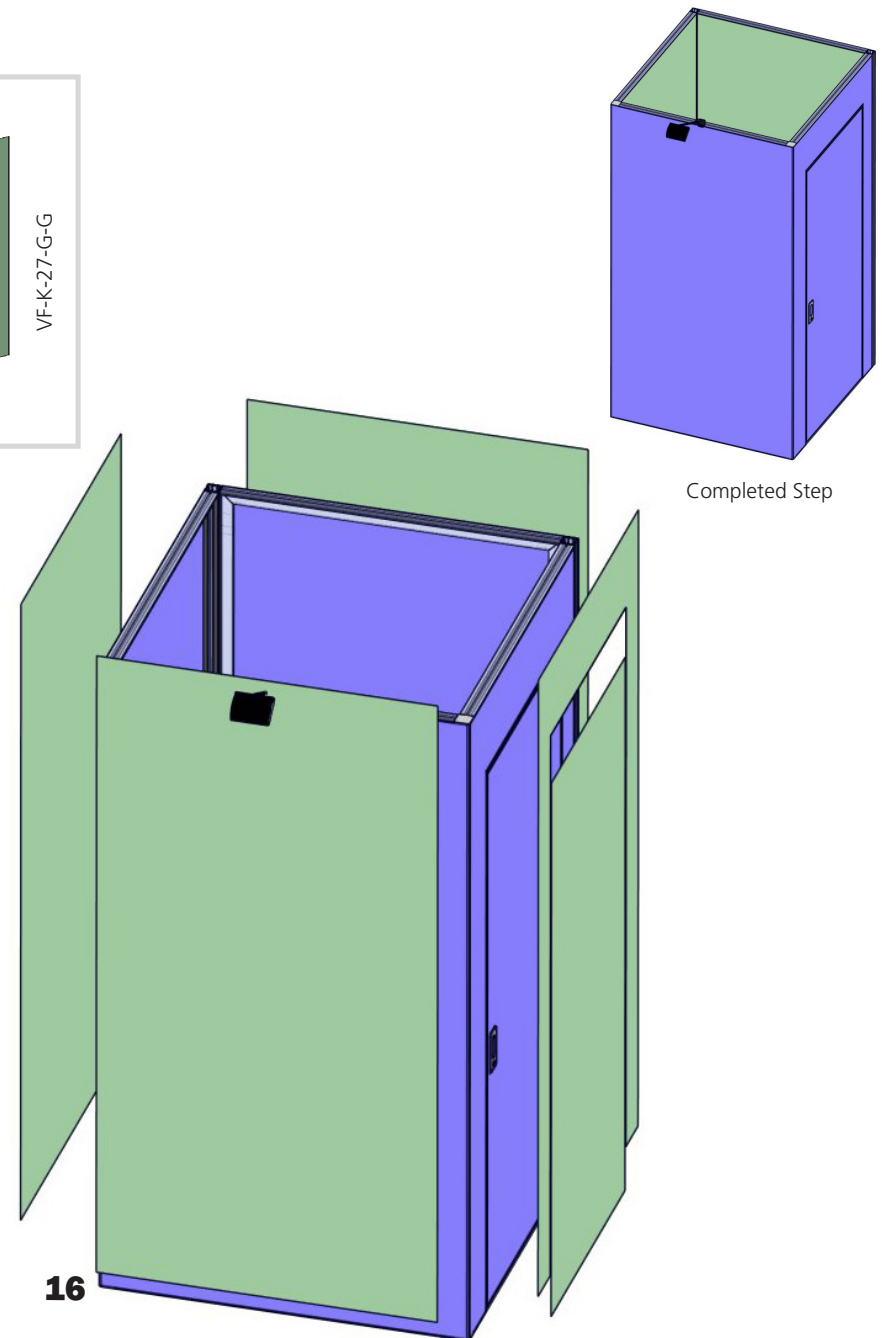




# Backwall Assembly

For this step you will need:

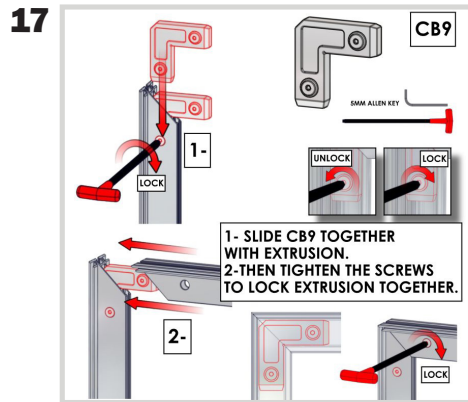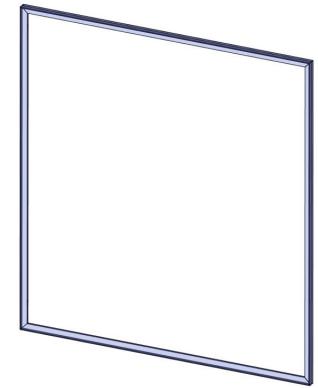
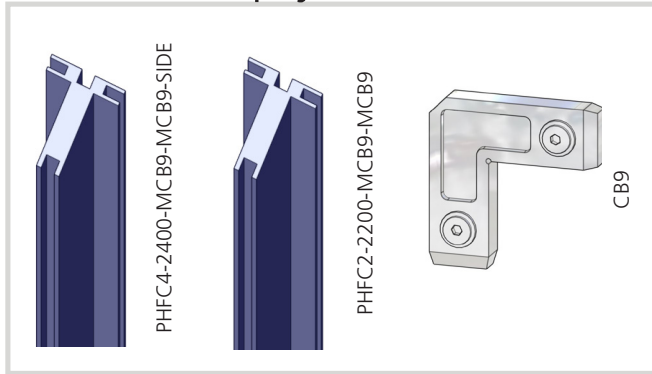


Attach the backwall together using the Allen Tool and the CB9 Connectors.

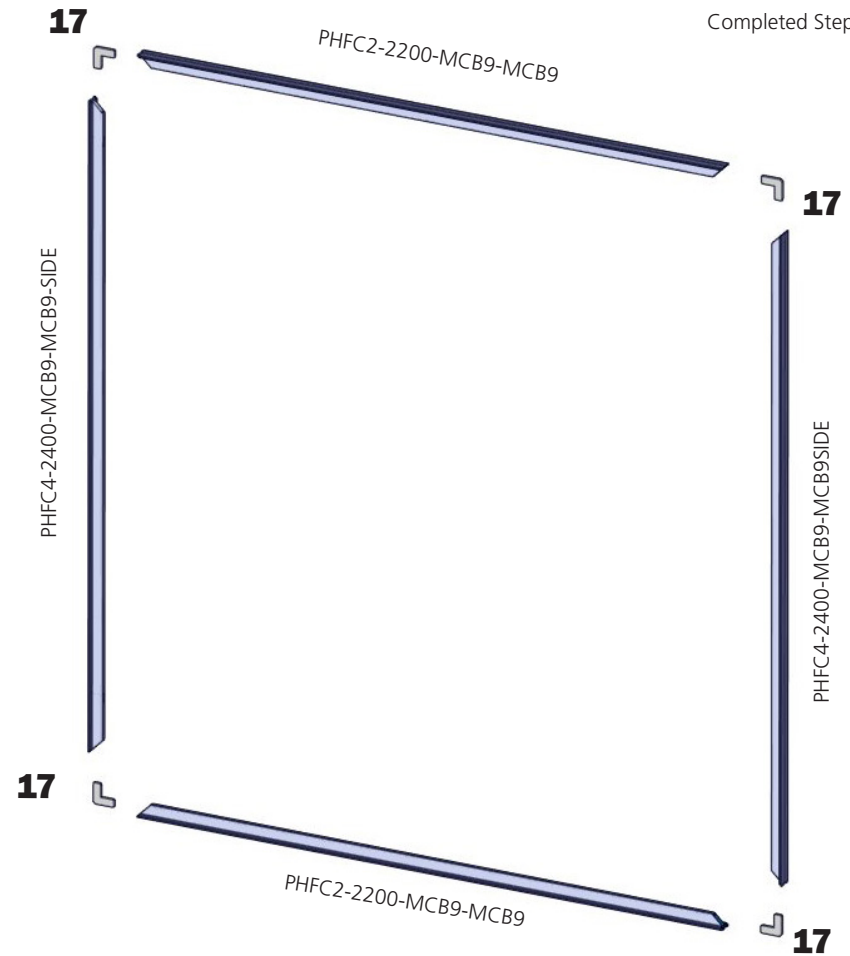


# Backwall Assembly


For this step you will need:

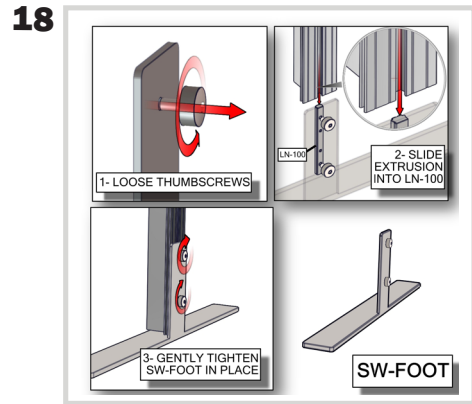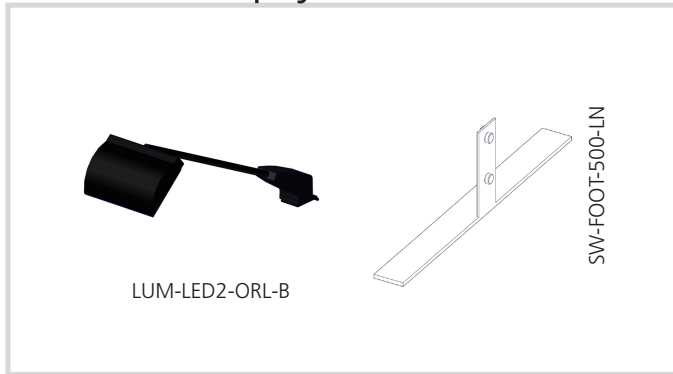

Slide the baseplate on the side of the extrusion in the channel then screw in place with the thumbscrew.



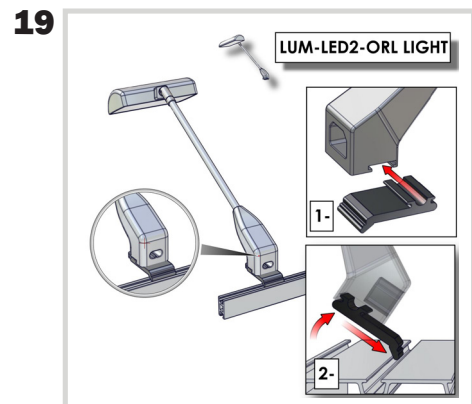


Using the bottom clip attached to the light slip the plastic bottom into the channel on top of the PHFC2.


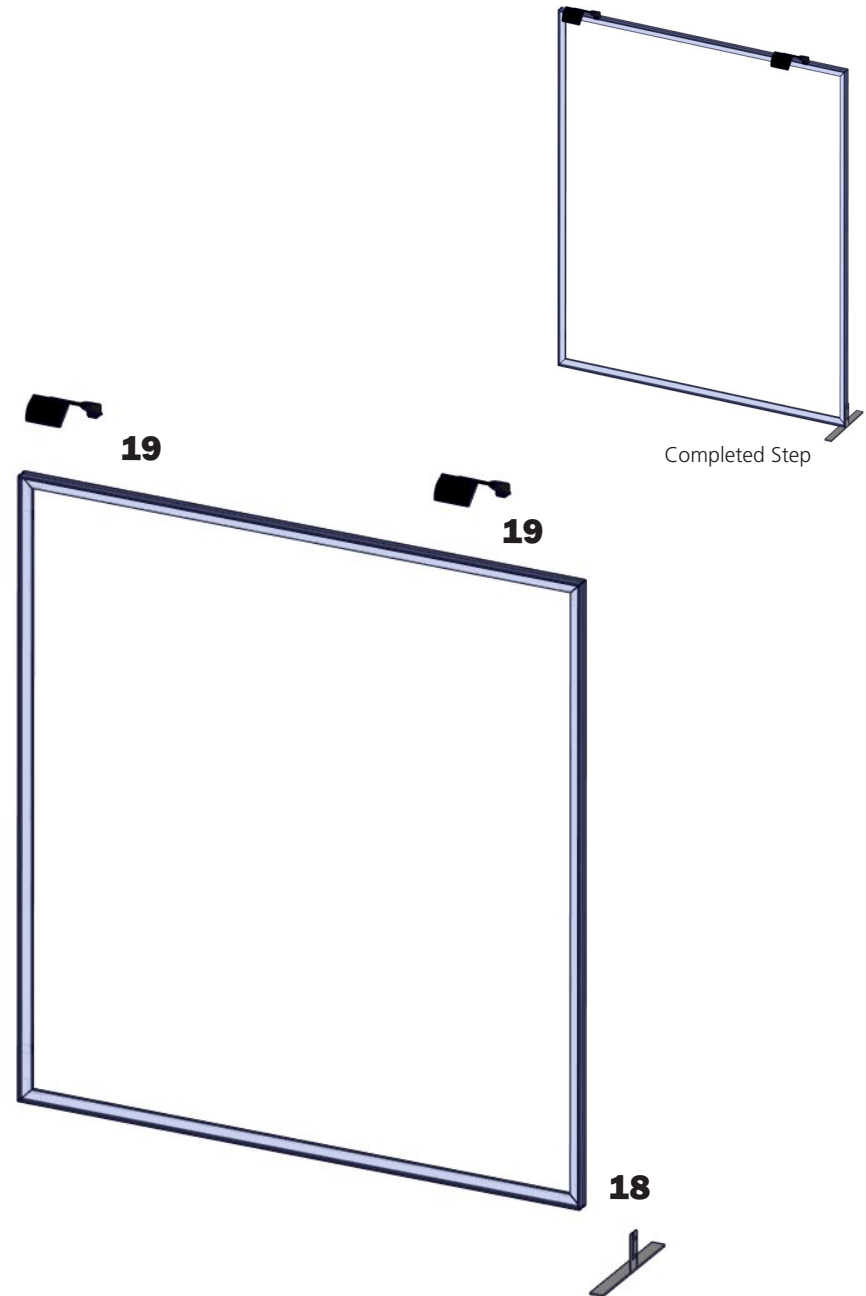


# Closet and Backwall Assembly

For this step you will need:

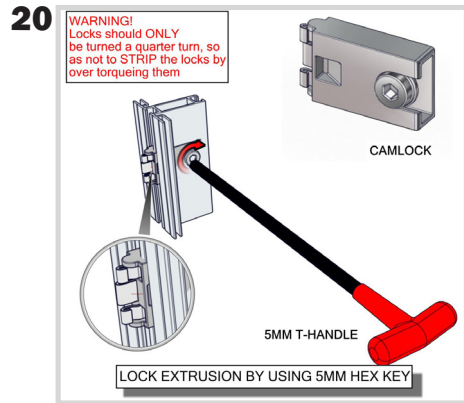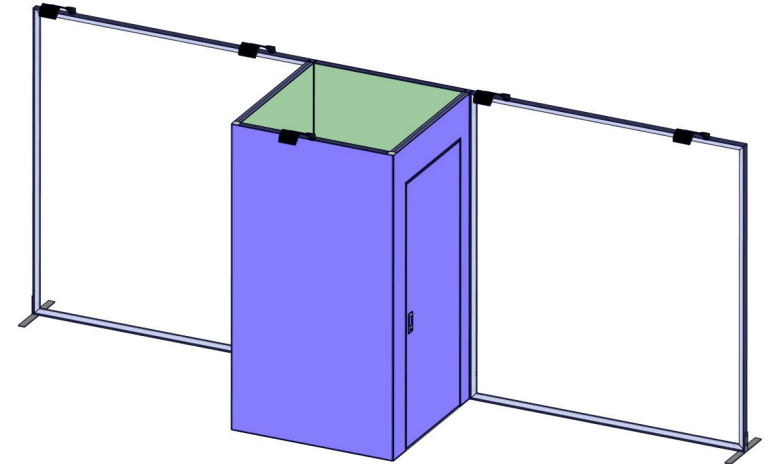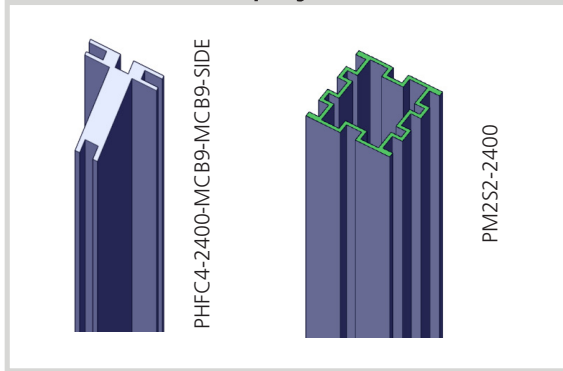



Inside the PHFC2s are cam locks.

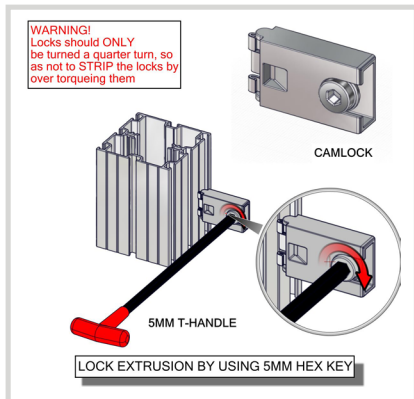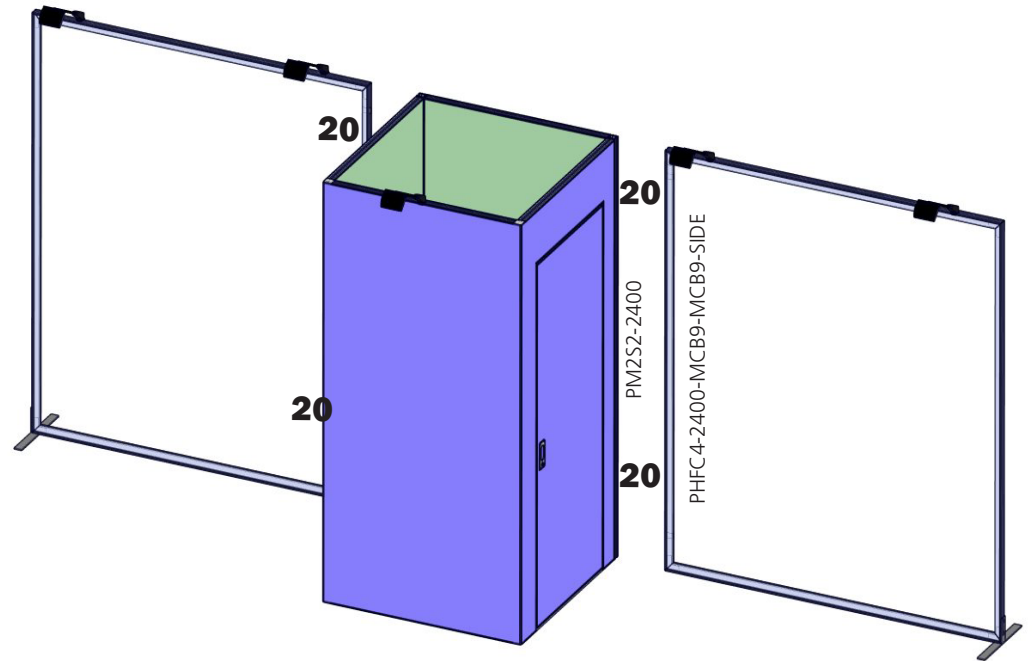


These will attach the PHFC2 to the side of the PMFC2. So you can connect your closet and backwall.

# Backwall Graphic & Liner Application


For this step you will need:

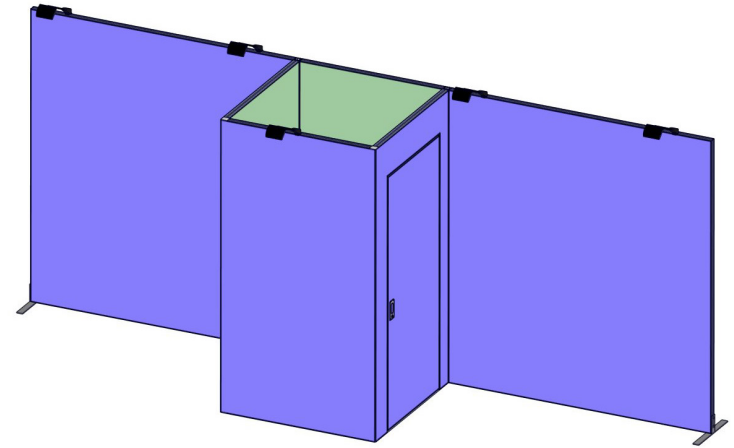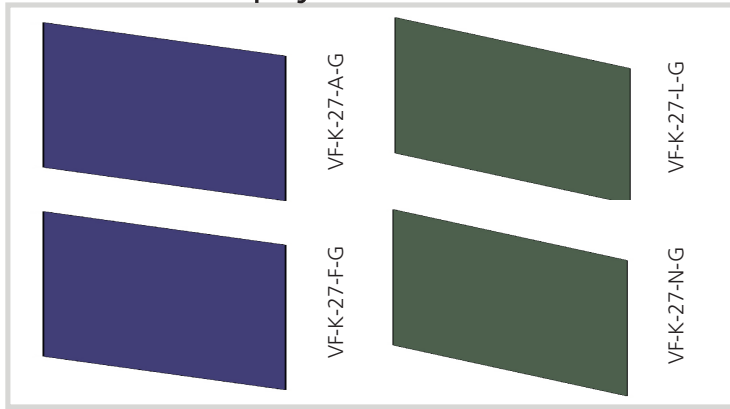


Completed Step

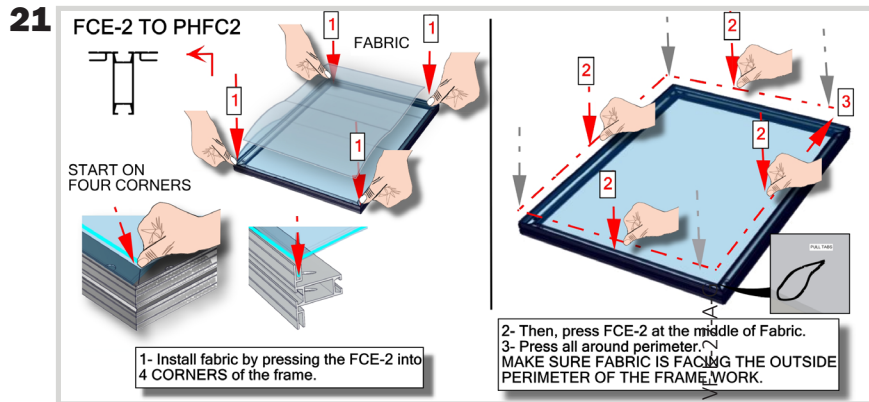

Place the FCE-2 part of the graphic and liner into the outer channels of the PHFC2.

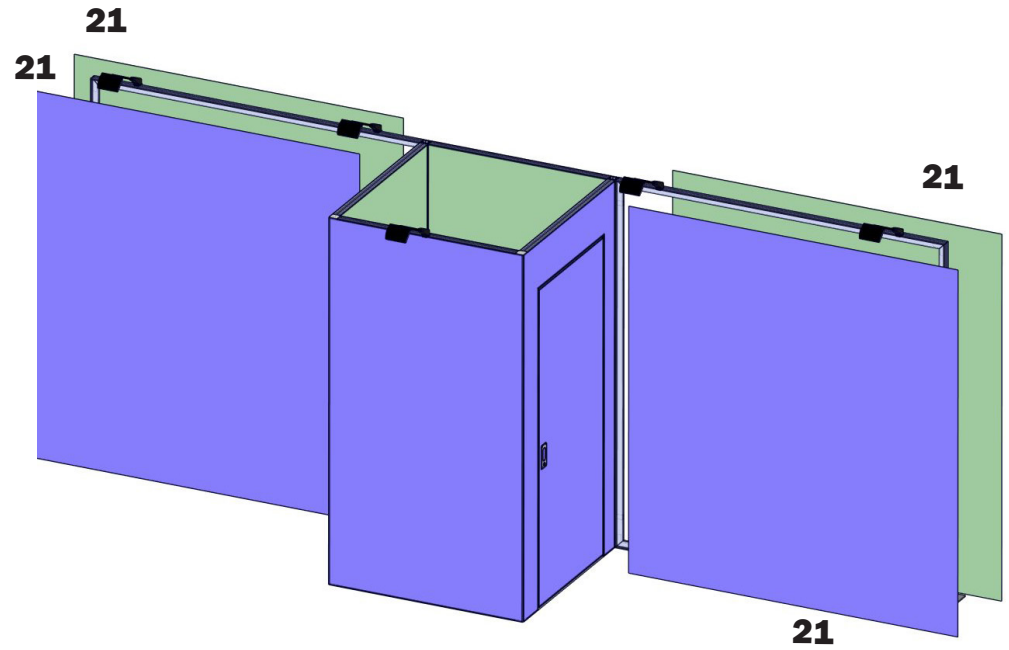

# Completing your Kit

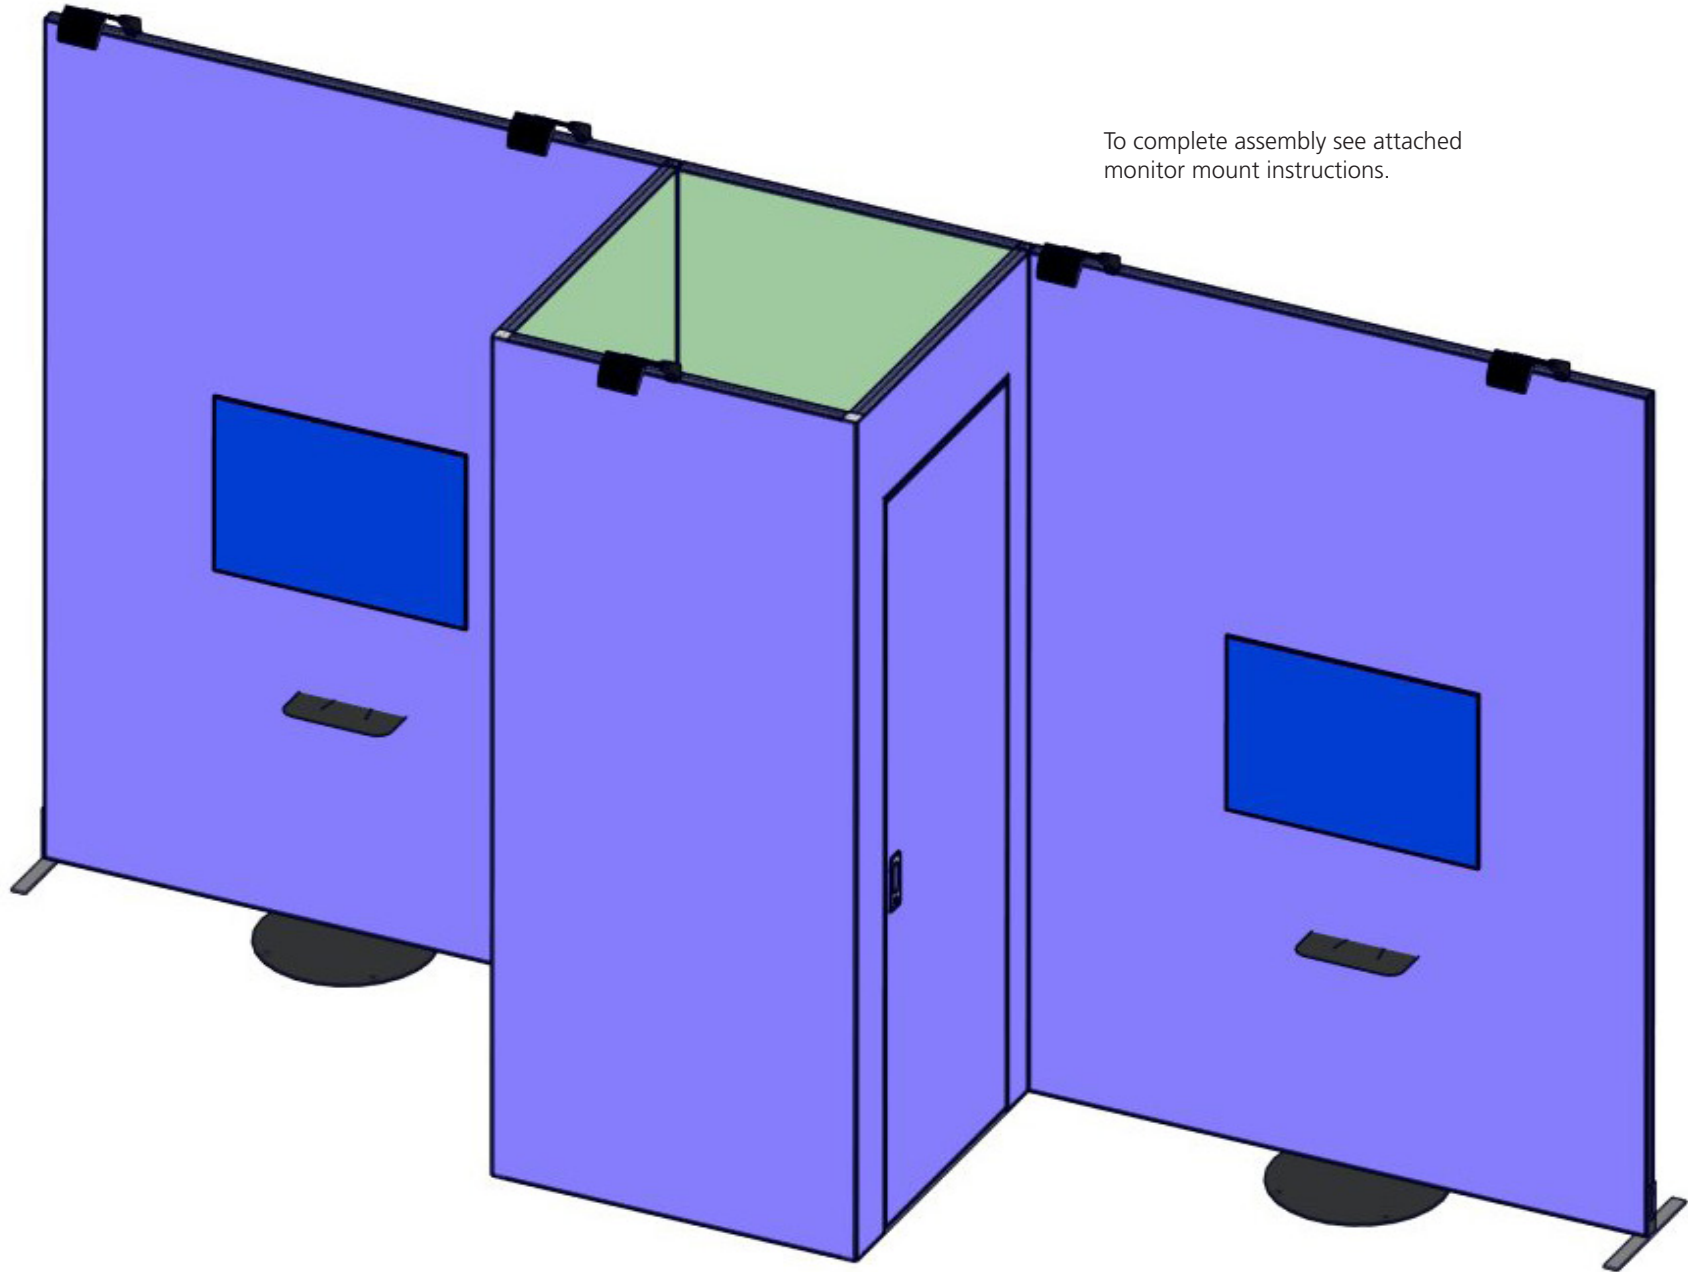

To complete assembly see attached monitor mount instructions.

# Free Standing Split Monitor Kiosk

## FREESTANDING-SPLIT-MM-2

The Freestanding Monitor Kiosk supports large screen LCDs and plasma flat panel monitors for use in trade show exhibits, at events and in all types of interior spaces. Video is an excellent way to show your large scale products, solutions and explain your services face to face. This elegant, stand-alone display supports a TV with a maximum weight of 40 lbs.



### features and benefits:

- Standard black aluminum post and base
  - Quick to set up
  - Weighted base for added stability
  - Supports large monitor 32-70"
  - Max TV weight = 40 lbs
  - Monitor not included
- Kit includes: Top pole, bottom pole, counter, base, monitor mount assembly
  - Lifetime hardware warranty against manufacturer defects




### dimensions:

Hardware	Graphic
<p>Assembled unit: 26.25" w x 75.25" h x 23.56" d 667mm(w) x 1912mm(h) x 599mm(d)</p> <p>Approximate weight: 45 lbs / 21 kg</p>	<p>Refer to related graphic template for more information.</p> <p>Visit: <a href="http://www.exhibitors-handbook.com/graphic-templates">www.exhibitors-handbook.com/graphic-templates</a></p>
Shipping	<b>additional information:</b>
<p>Packing case(s): 1 Box(es)</p> <p>Shipping dimensions: 34" l x 28" h x 7" d 864mm(l) x 712mm(h) x 178mm(d)</p> <p>Approximate total shipping weight: 50 lbs / 23 kg</p>	<p>When included in a larger kit, a different packaging solution will be listed to accommodate all contents of the kit. Individual packaging no longer provided.</p>

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

# Included In Your Kit

Tools, Components, & Connectors

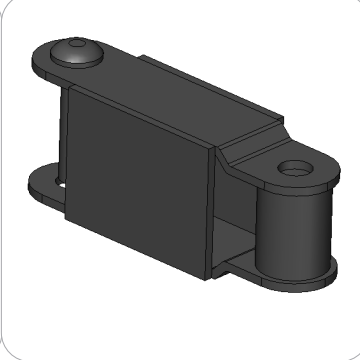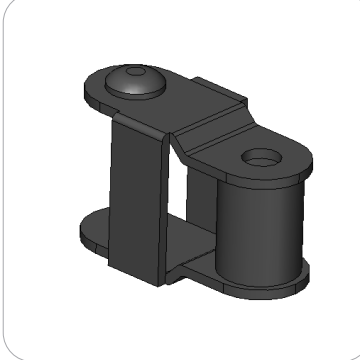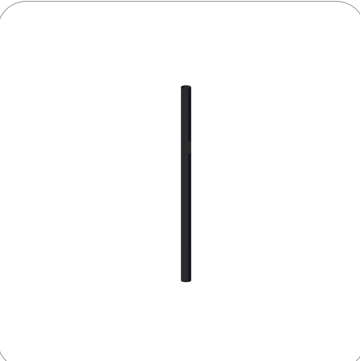

TOP POLE x1

BOTTOM POLE x1

COUNTER x1


FREESTANDING-SPLIT-EXT-2 x1

FREESTANDING-SPLIT-EXT-4 x1



# Exploded Diagram

FREESTANDING-SPLIT-MM-2

FREESTANDING -SPLIT-EXT-2

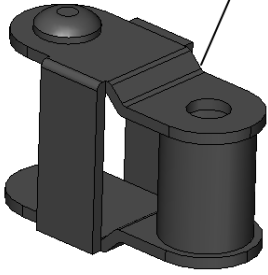

FREESTANDING-SPLIT-EXT-4

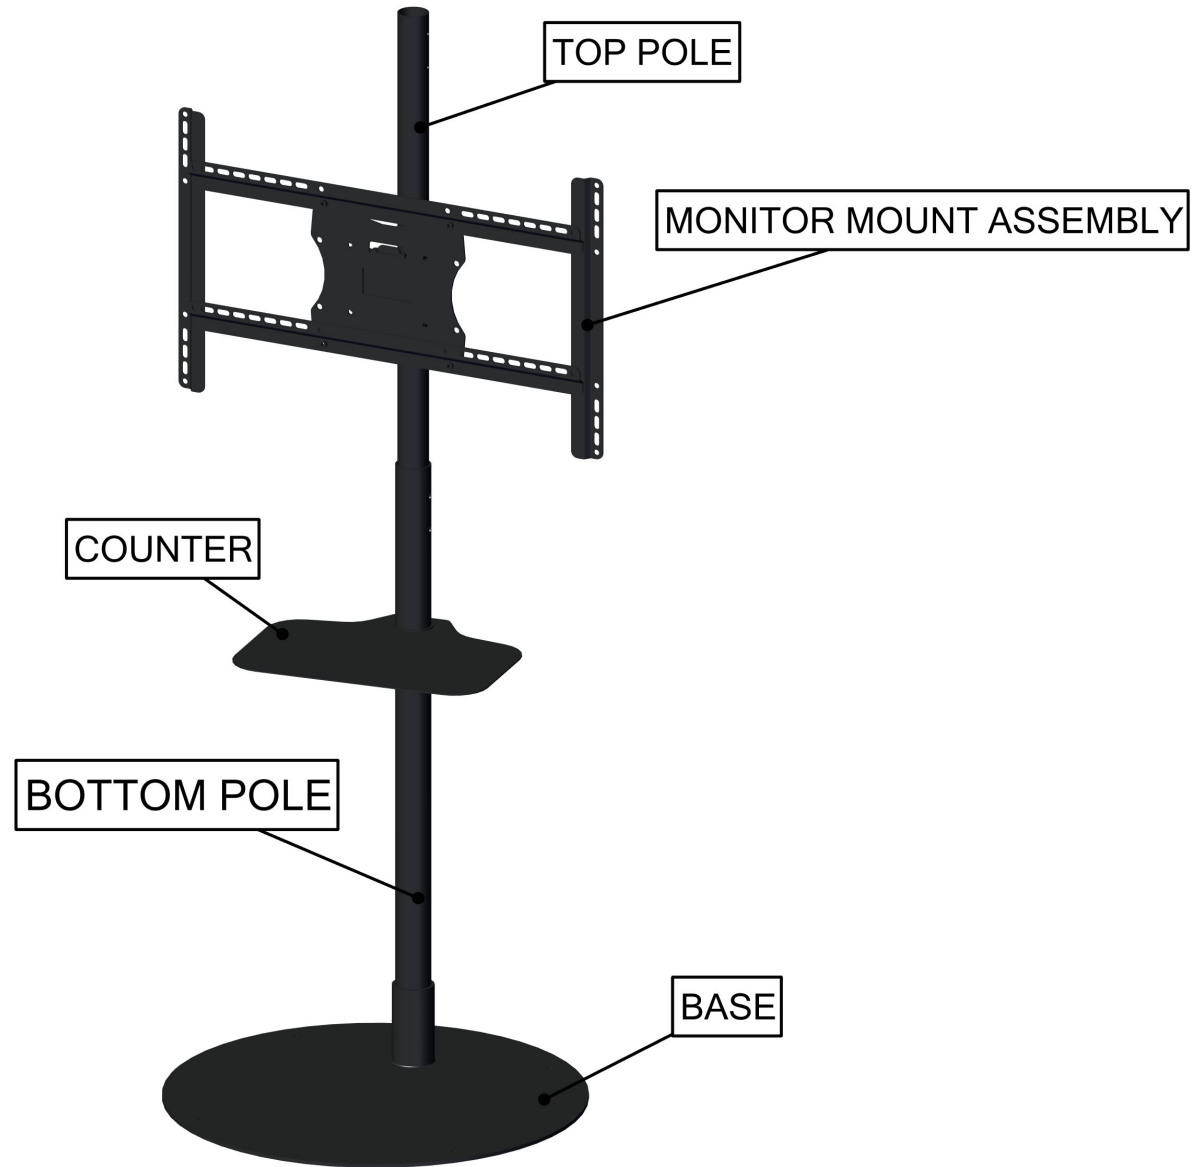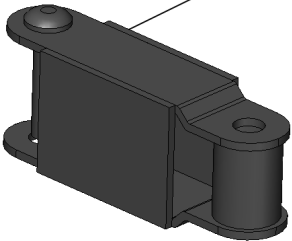




# Kit Assembly

## Step by Step

### Step 1.

Gather the components to build the bottom section. Use the Exploded View for part labels.

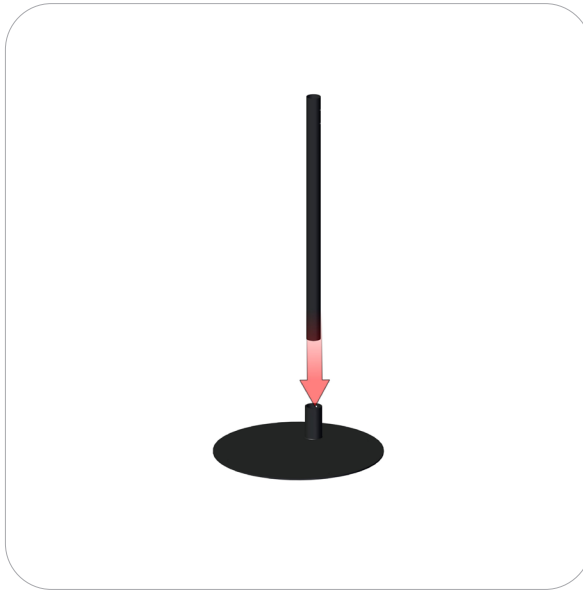


### Step 2.

Gather the components to build the top section. Use the Exploded View for part labels.



### Step 3.

Gather the components to install counter. Use the Exploded View for part labels.

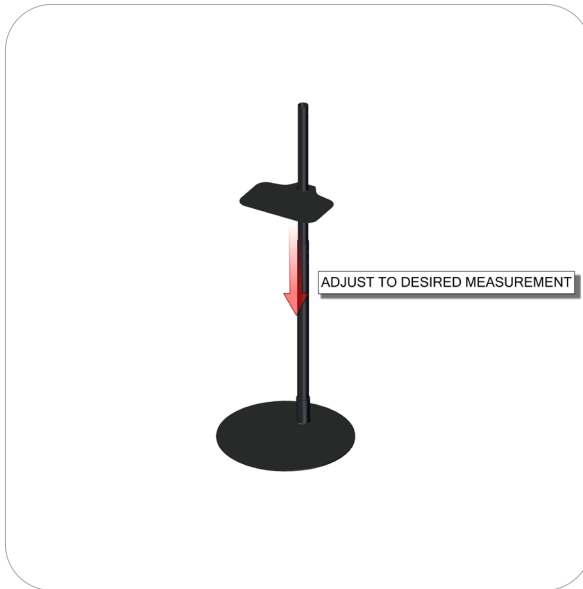

### Step 4.

Gather the components to attach monitor bracket. Use the Exploded View for part labels.

Reference Connection Method(s) 1 for more details.



# Kit Assembly

## Step by Step

### Step 5.

Gather the components to build the monitor supports. Use the Exploded View for part labels.



### Step 6.

Gather the components to attach supports to the monitor. Use the Exploded View for part labels.



### Step 7.

Setup is complete.



### Step 8.

2" & 4" EXTENTION HARDWARE

The extension parts help extend monitor 2" or 4" out from the stand, if needed for placement behind display or any other obstruction. More details follow this page.




# Kit Assembly

## Step by Step

### Step 9.

Gather the components to attach 2" monitor supports. Use the Exploded View for part labels.




FREESTANDING -SPLIT-EXT-2



### Step 10.


Gather the components to attach 4" supports to the monitor. Use the Exploded View for part labels.

FREESTANDING -SPLIT-EXT-4

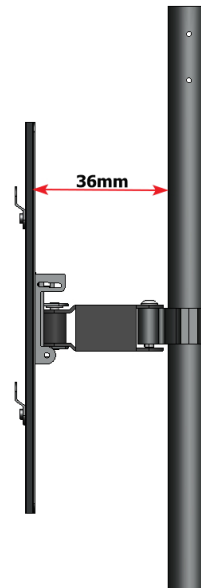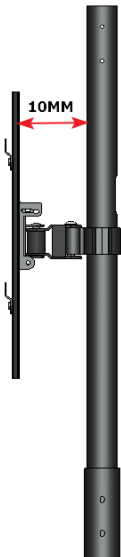


# Connection Methods

## Connection Method 1: ATTACH MOUNT TO STAND

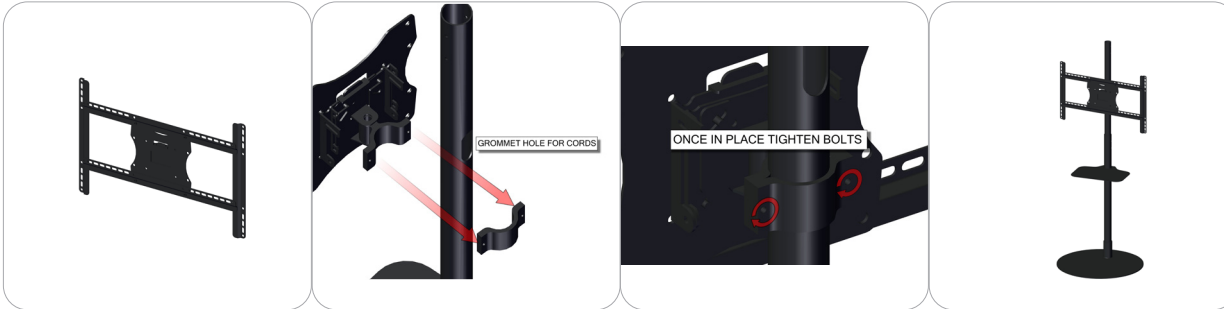

First, attach bracket to stand using both hands to hold in place. Once front and back brackets are lined up, insert bolts. Tighten to ensure monitor mount does not move. Do not over tighten, may damage stand or hardware. Monitor should be attached last. Do not try to attach brackets with monitor attached. This may lead to damaging monitor or injury.

## Connection Method 2: ATTACH 2" FREESTANDING-SPLIT-EXT-2

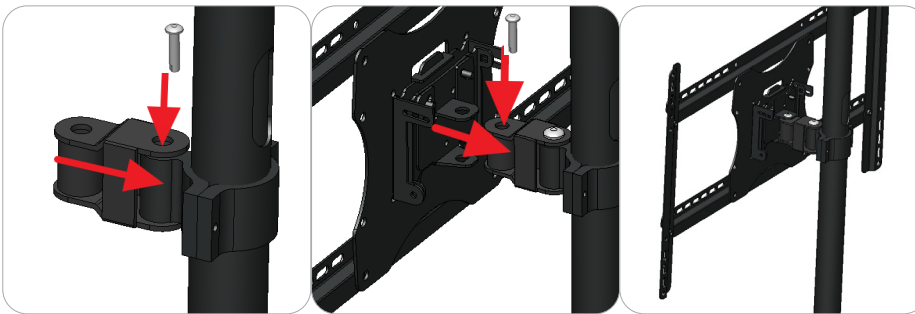

First, attach bracket to stand using both hands to hold in place. Once front and back brackets are lined up, insert bolts. Tighten to ensure monitor mount does not move. Do not over tighten, may damage stand or hardware. Monitor should be attached last. Do not try to attach brackets with monitor attached. This may lead to damaging monitor or injury.

## Connection Method 3: ATTACH 4" FREESTANDING-SPLIT-EXT-4



First, attach bracket to stand using both hands to hold in place. Once front and back brackets are lined up, insert bolts. Tighten to ensure monitor mount does not move. Do not over tighten, may damage stand or hardware. Monitor should be attached last. Do not try to attach brackets with monitor attached. This may lead to damaging monitor or injury.